

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
3 October 2002 (03.10.2002)

PCT

(10) International Publication Number
WO 02/077847 A1(51) International Patent Classification⁷: G06F 15/173

(21) International Application Number: PCT/IL02/00037

(22) International Filing Date: 16 January 2002 (16.01.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/274,657 12 March 2001 (12.03.2001) US
10/003,269 6 December 2001 (06.12.2001) US(71) Applicant (for all designated States except US): VIDIUS
INC. [US/US]; 10435 Santa Monica Blvd., Los Angeles,
CA 90025 (US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): PELED, Ariel

[IL/IL]; 22 Almogan Street, 40500 Even Yehuda (IL).
TROYANSKY, Lidror [IL/IL]; 25 Kanfey-Nesharim
Street, 52357 Ramat Gan (IL). CARNY, Ofir [IL/IL];
16 Hayam Street, 44864 Kochav Yair (IL). TIROSH,
Oren [IL/IL]; 17 Yeshurun Street, 45200 Hod Hasharon
(IL). ROGLIT, Guy [IL/IL]; 5 Szold Street, 47225
Ramat HaSharon (IL). GUTMAN, Galit [IL/IL]; 129a
HaMeginim Street, 35028 Haifa (IL).(74) Agents: G. E. EHRlich (1995) LTD. et al.; 28 Bezalel
Street, 52521 Ramat Gan (IL).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: A SYSTEM AND METHOD FOR MONITORING UNAUTHORIZED TRANSPORT OF DIGITAL CONTENT

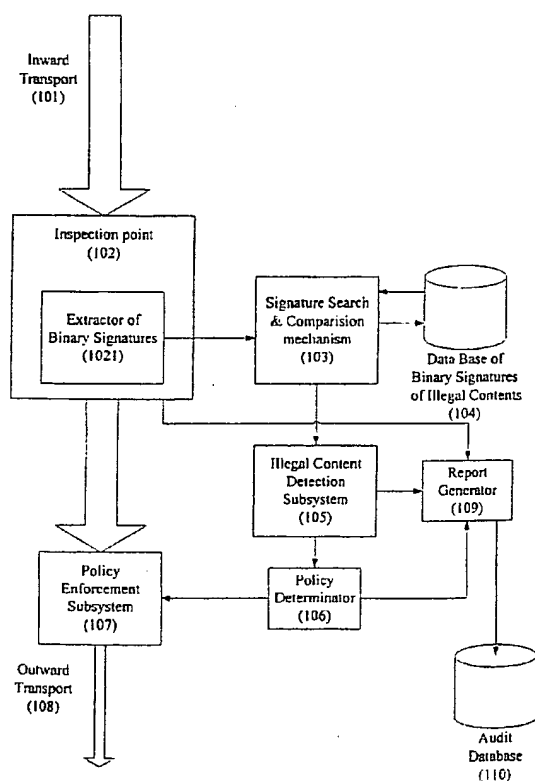

(57) Abstract: A system for network content monitoring and control, comprising: a transport data monitor, connectable to a point in a network, for monitoring data being transported past said point, a signature extractor (1021), associated with said transport data monitor, for extracting a derivation of said data, said derivation being indicative of content of said payload, a database (104) of preobtained signatures of content whose movements it is desired to monitor, and a comparator (103) for comparing said derivation with said preobtained signatures, thereby to determine whether said payload comprises any of said content whose movements it is desired to monitor. The monitoring result may be used in bandwidth control on the network to restrict transport of the content it is desired to control.



(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, EG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

A SYSTEM AND METHOD FOR MONITORING
UNAUTHORIZED TRANSPORT OF DIGITAL CONTENT

CROSS-REFERENCE TO RELATED APPLICATIONS

5 This application claims priority from U.S. Provisional Patent
Application No. 60/274,657, filed March 12, 2001, the contents of which are
hereby incorporated herein by reference in their entirety.

FIELD OF THE INVENTION

10 The present invention relates to monitoring transport of digital
content, particularly but not exclusively for the enforcement of digital
copyright, secrecy and confidentiality.

BACKGROUND OF THE INVENTION

15 Modern businesses and industries rely heavily on digital media
as primary means of communication and documentation. Digital media can
be easily copied and distributed (e.g., via e-mail and peer-to-peer networks),
and therefore the hazards of business espionage and data leakage are of
major concern: Companies are at daily risk of losing sensitive internal
20 documents, leading to substantial financial losses. Banking, legal, medical,
government, and manufacturing companies have much to lose if sensitive
internal documents are leaked. The safe distribution of internal documents,
memos, blueprints, payroll records, patient medical information, banking

and financial transactions etc, is becoming more complex to ensure. In fact, as a consequence of such leaks, the United States federal government was prompted to intervene and has mandated that companies should protect sensitive information such as financial and patient medical records. From the
5 companies and businesses standpoint, potential risks include financial losses, fiduciary risks, legal problems, competitive intelligence, public relations problems, loss of clients and privacy liability. There is therefore a great interest in methods that may mitigate digital espionage in particular and confidential data leakage in general.

10 In addition, unauthorized and / or illegal copying and distribution of multimedia content, such as audio and video, has become highly prevalent in recent years, especially via the Internet. Such unauthorized copying and distribution is an infringement of copyright protection laws and cause financial damage to the rightful owners of the content. It is therefore of
15 great interest to find methods that may stop or at least reduce illegal copying and / or distribution of multimedia files without interfering with legitimate activities.

Most current computer networks security solutions focus mainly on preventing outside penetration into the organization and do not provide an
20 adequate solution to the transfer of sensitive documents originating from within the company. These solutions are usually based on Firewall or Antivirus models that do not stop negligent or malicious email, Web-based mail or FTP file transfers.

Methods and systems for preventing the sending (i.e. outgoing transport) of digital content exist. Some methods assign a digital signature to each file and do not permit sending of a signed document without adequate authorization. However, such methods can easily be circumvented by transforming the content to another format or otherwise changing the content without altering the actual information content. Other known methods use file extension, file size and key word filtering: for example, a filter is set which searches for a predetermined word such as "finance" and prevents any document containing the predetermined word from being sent. Such a filter may be either too selective or too permissive, since the decision is based on scarce information.

Methods for digital rights management (DRM) and digital copyright protection exist. Some methods are designed to control and monitor digital copying of the content. For example, US patent 6,115,533 describes authentication of an information signal prior to mass duplication of the signal by analyzing the signal to detect the presence or absence of a security signal therein, inserting a security signal into the information signal, and recording the modified signal only if no security signal was detected. US patent 6,167,136 describes a method for securely storing analog or digital data on a data storage medium: an analog information signal is then combined with a noise signal. The composite noise and information signal is encrypted with a key, which is derived from the noise signal. In US patent 6,006,332 a system is provided for controlling access to digitized data. In the system, an insecure client is

provided with a launch pad program which is capable of communicating with a secure Rights Management server. The launch pad program provides an indicator to a public browser, used by the unsecured client, which acknowledges when a rights management controlled object is detected. While
5 these methods make illegal copying difficult, it is commonly believed that none of the existing methods is effective against a determined and competent opponent. Furthermore, once a certain protection method is cracked, the cracking tools and methods become available to a large community thereby rendering the protection method ineffective.

10 Methods for usage rights enforcement of digital media in file sharing systems are also known. Some methods are designed to provide protection against centralized file sharing systems, where searching for the desired file is performed using an index that is located in a central server. e.g., the "NAPSTER" file sharing system. In this case, software on the
15 central server can monitor the indexed file and prohibit illegal usage. Such methods require cooperation from the server operator. However, copyright protection against decentralized, "peer to peer" files sharing networks e.g., "Gnutella" and "FreeNet" and document distribution networks e.g. "Internet Newsgroups", as well as protection against centralized file sharing networks
20 without the cooperation of the server operator, are much harder, and these problems are not addressed by current methods.

Other methods attempt to use bandwidth management tools in order to reduce the available bandwidth for multimedia transport in places

where such transport is suspected of carrying a large proportion of illegal content. The inspection is performed, in general, in the "application layer". However, such methods are in general not selective enough, that is to say they do not distinguish effectively between legal and illegal (or
5 unauthorized) content, and thus may interfere with legitimate data traffic.

It is foreseeable that as the availability of disk space and bandwidth for data communication increases, unauthorized and illegal distribution of digital content may increase and become more prevalent unless effective counter-measures are taken.

10

SUMMARY OF THE INVENTION

The present invention seeks to provide a novel method and system for the mitigation of illegal and unauthorized transport of digital content, without otherwise interfering with rightful usage and the privacy of the users.
15 Specifically, the current invention provides methods that allow inspection and analysis of digital traffic in computer networks and automatic detection of unauthorized content within the inspected traffic. The detection method is generally based on extraction of features from the transportation itself that carry information about the specific content (or information which can be used
20 in order to gather such information.) A comparison is then performed with a database that contains features that have been extracted from the copyrighted or confidential items that are to be protected. The inspection and analysis may be performed in various layers of the network protocol layers 2 – 7 in the OSI

model (an hardware implementation may also utilize layer 1) and the coherency between the various layers may be maintained by introducing the concept of an atomic channel, as will be described in more detail below.

Upon detection of illegal transport, the system preferably audits the
5 transport details and enforces transport policy, such as blocking the transport or reduction of the bandwidth available for this transport. To this end, a novel method for bandwidth reduction, that overcomes drawbacks of current methods, is also provided herein. The system may for example be implemented as a firewall or as an extension to existing firewall systems, or in other forms,
10 and can monitor ingoing and \ or outgoing transport.

In another embodiment, a database of signatures of confidential, copyrighted, illegal or otherwise restricted materials may be used in order to identify and possibly block the transport of the materials from a restricted zone. Such implementation is important also because the present peer-to-peer
15 networks effectively create an "alternative Internet" that renders many of the current standard firewall techniques ineffective or too untargeted. For example, such a firewall technique may leave the system administrator the option of either completely blocking whole classes of transport or not blocking such traffic as a whole and instead relying on specific data. Specifically,
20 practices based on locating the other party to the communication are often rendered ineffective, due to the pseudo-anonymous nature of particular networks.

The present invention may also be used in combination with certification methods and techniques in order to allow un-inspected, un-restricted or otherwise privileged usage to certificated users.

The present invention can also be used in order to accumulate
5 consumption statistics and / or other useful statistical analysis of the analyzed transport.

According to a first aspect of the present invention there is provided a system for network content monitoring, comprising:

- 10 a transport data monitor, connectable to a point in a network, for monitoring data being transported past the point,
- a description extractor, associated with the transport data monitor, for extracting descriptions of the data being transported,
- a database of at least one preobtained description of content whose movements it is desired to monitor, and
- 15 a comparator for determining whether the extracted description corresponds to any of the at least one preobtained descriptions, thereby to determine whether the data being transported comprises any of the content whose movements it is desired to monitor.

Preferably, the description extractor is operable to extract a pattern
20 identifiably descriptive of the data being transported.

Preferably, the description extractor is operable to extract a signature of the data being transported.

Preferably, the description extractor is operable to extract characteristics of the data being transported.

Preferably, the description extractor is operable to extract encapsulated meta information of the data being transported.

5 Preferably, the description extractor is operable to extract multi-level descriptions of the data being transported.

Preferably, the multi-level description is comprises of a pattern identifiably descriptive of the data being transported.

Preferably, the multi-level description is comprises a signature of the
10 data being transported.

Preferably, the multi-level description comprises characteristics of the data being transported.

Preferably, the multi-level description comprises encapsulated meta-information of the data being transported.

15 Preferably, the description extractor is a signature extractor, for extracting a derivation of the data, the derivation being a signature indicative of content of the data being transported, and wherein the at least one preobtained description is a preobtained signature.

Preferably, the network is a packet-switched network and the data
20 being transported comprises passing packets.

Preferably, the network is a packet-switched network, the data being transported comprises passing packets and the transport data monitor is operable to monitor header content of the passing packets.

Preferably, the network is a packet-switched network, the data being transported comprises passing packets, and the transport data extractor is operable to monitor header content and data content of the passing packets.

Preferably, the transport data monitor is a software agent, operable
5 to place itself on a predetermined node of the network.

Preferably, the system comprises a plurality of transport data monitors distributed over a plurality of points on the network.

Preferably, the transport data monitor further comprising a multimedia filter for determining whether passing content comprises
10 multimedia data and restricting the signature extraction to the multimedia data.

18. A system according to claim 1, the data being transported comprising a plurality of protocol layers, the system further comprising a layer analyzer connected between the transport data monitor and the signature
15 extractor, the layer analyzer comprising analyzer modules for at least two of the layers.

Preferably, the layer analyzer comprises separate analyzer modules for respective layers.

Preferably, the system comprises a traffic associator, connected to
20 the analyzer modules, for using output from the analyzer modules to associate transport data from different sources as a single communication.

Preferably, the sources include any of data packets, communication channels, data monitors, and pre correlated data.

Preferably, the system comprises a traffic state associator connected to receive output from the layer analyzer modules, and to associate together output, of different layer analyzer modules, which belongs to a single communication.

5 Preferably, at least one of the analyzer modules comprises a multimedia filter for determining whether passing content comprises multimedia data and restricting the signature extraction to the multimedia data.

 Preferably, at least one of the analyzer modules comprises a compression detector for determining whether the extracted transport data is
10 compressed.

 Preferably, the system comprises a decompressor, associated with the compression detector, for decompressing the data if it is determined that the data is compressed.

 Preferably, the system comprises a description extractor for
15 extracting a description directly from the compressed data.

 Preferably, at least one of the analyzer modules comprises an encryption detector for determining whether the transport data is encrypted.

 Preferably, the encryption detector comprises an entropy measurement unit for measuring entropy of the monitored transport data.

20 Preferably, the encryption detector is set to recognize a high entropy as an indication that encrypted data is present.

 Preferably, the encryption detector is set to use a height of the measured entropy as a confidence level of the encrypted data indication.

Preferably, the system comprises a format detector for determining a format of the monitored transport data.

Preferably, the system comprises a media player, associated with the format detector, for rendering and playing the monitored transport data as
5 media according to the detected format, thereby to place the monitored transport data in condition for extraction of a signature which is independent of a transportation format.

Preferably, the system comprises a parser, associated with the format detector, for parsing the monitored transport media, thereby to place the
10 monitored transport data in condition for extraction of a signature which is independent of a transportation format.

Preferably, the system comprises a payload extractor located between the transport monitor and the signature extractor for extracting content carrying data for signature extraction.

15 Preferably, the signature extractor comprises a binary function for applying to the monitored transport data.

Preferably, the network is a packet network, and a buffer is associated with the signature extractor to enable the signature extractor to extract a signature from a buffered batch of packets.

20 Preferably, the binary function comprises at least one hash function.

Preferably, the binary function comprises a first, fast, hash function to identify an offset in the monitored transport data and a second, full, hash function for application to the monitored transport data using the offset.

Preferably, the signature extractor comprises an audio signature extractor for extracting a signature from an audio part of the monitored data being transported.

Preferably, the signature extractor comprises a video signature
5 extractor for extracting a signature from a video part of the monitored data being transported.

Preferably, the signature extractor comprises a pre-processor for pre-processing the monitored data being transported to improve signature extraction.

10 Preferably, the preprocessor carries out at least one of: removing erroneous data, removing redundancy, and canonizing properties of the monitored data being transported.

Preferably, the signal extractor comprises a binary signal extractor for initial signature extraction and an audio signature extractor for extracting an
15 audio signature in the event the initial signature extraction fails to yield an identification.

Preferably, the signal extractor comprises a binary signal extractor for initial signature extraction and a text signature extractor for extracting a text signature in the event the initial signature extraction fails to yield an
20 identification.

Preferably, the signal extractor comprises a binary signal extractor for initial signature extraction and a code signature extractor for extracting a

code signature in the event the initial signature extraction fails to yield an identification.

Preferably, the signal extractor comprises a binary signal extractor for initial signature extraction and a data content signature extractor for
5 extracting a data content signature in the event the initial signature extraction fails to yield an identification.

Preferably, the signature extractor is operable to use a plurality of signature extraction approaches.

Preferably, the system comprises a combiner for producing a
10 combination of extracted signatures of each of the approaches.

Preferably, the comparator is operable to compare using signatures of each of the approaches and to use as a comparison output a highest result of each of the approaches.

Preferably, the signal extractor comprises a binary signal extractor
15 for initial signature extraction and a video signature extractor for extracting a video signature in the event the initial signature extraction fails to yield an identification.

Preferably, there is a plurality of preobtained signatures and the comparator is operable to compare the extracted signature with each one of the
20 preobtained signatures, thereby to determine whether the monitored transport data belongs to a content source which is the same as any of the signatures.

Preferably, the comparator is operable to obtain a cumulated number of matches of the extracted signature.

Preferably, the comparator is operable to calculate a likelihood of compatibility with each of the preobtained signatures and to output a highest one of the probabilities to an unauthorized content presence determinator connected subsequently to the comparator.

5 Preferably, the comparator is operable to calculate a likelihood of compatibility with each of the preobtained signatures and to output an accumulated total of matches which exceed a threshold probability level.

 Preferably, the comparator is operable to calculate the likelihood of compatibility with each of the preobtained signatures and to output an
10 accumulated likelihood of matches which exceed a threshold probability level.

 Preferably, the system comprises a sequential decision unit associated with the comparator to use a sequential decision test to update a likelihood of the presence of given content, based on at least one of the following: successive matches made by the comparator, context related
15 parameters, other content related parameters and outside parameters.

 Preferably, the unauthorized content presence determinator is operable to use the output of the comparator to determine whether unauthorized content is present in the transport and to output a positive decision of the presence to a subsequently connected policy determinator.

20 Preferably, an unauthorized content presence determinator is connected subsequently to the comparator and is operable to use an output of the comparator to determine whether unauthorized content is present in the data

being transported, a positive decision of the presence being output to a subsequently connected policy determinator.

Preferably, the policy determinator comprises a rule-based decision making unit for producing an enforcement decision based on output of at least
5 the unauthorized content presence determinator.

Preferably, the policy determinator is operable to use the rule-based decision making unit to select between a set of outputs including at least some of: taking no action, performing auditing, outputting a transcript of the content, reducing bandwidth assigned to the transport, using an active bitstream
10 interference technique, stopping the transport, preventing printing, preventing photocopying, reducing quality of the content, removing sensitive parts, altering the content, adding a message to the the content, and preventing of saving on a portable medium,

Preferably, the rule-based decision making unit is operable to use a
15 likelihood level of a signature identification as an input in order to make the selection.

Preferably, a bandwidth management unit is connected to the policy determinator for managing network bandwidth assignment in accordance with output decisions of the policy determinator.

20 Preferably, there is provided an audit unit for preparing and storing audit reports of transportation of data identified as corresponding to content it is desired to monitor.

Preferably, the system comprises a transcript output unit for producing transcripts of content identified by the comparison.

Preferably, the system comprises a policy determinator connected to receive outcomes of the encryption determinator and to apply rule-based
5 decision making to select between a set of outputs including at least some of: taking no action, performing auditing, outputting a transcript of the content, reducing bandwidth assigned to the transport, using an active bitstream interference technique, and stopping the transport.

Preferably, the rule-based decision making comprises rules based on
10 confidence levels of the outcomes.

Preferably, the policy determinator is operable to use an input of an amount of encrypted transport from a given user as a factor in the rule based decision making.

Preferably, the system comprises a policy determinator connected to
15 receive positive outcomes of the encryption determinator and to apply rule-based decision making to select between a set of outputs including at least some of: taking no action, performing auditing, outputting a transcript of the content, reducing bandwidth assigned to the transport, using an active bitstream interference technique, and stopping the transport, the policy determinator
20 operable to use:

an input of an amount of encrypted transport from a given user, and the confidence level, as factors in the rule based decision making.

According to a second aspect of the present invention there is provided a system for network content control, comprising:

a transport data monitor, connectable to a point in a network, for monitoring data being transported past the point,

5 a signature extractor, associated with the transport data monitor, for extracting a derivation of payload of the monitored data, the derivation being indicative of content of the data,

a database of preobtained signatures of content whose movements it is desired to monitor,

10 a comparator for comparing the derivation with the preobtained signatures, thereby to determine whether the monitored data comprises any of the content whose movements it is desired to control,

a decision-making unit for producing an enforcement decision, using the output of the comparator, and

15 a bandwidth management unit connected to the decision-making unit for managing network bandwidth assignment in accordance with output decisions of the policy determinator, thereby to control content distribution over the network.

Preferably, the decision-making unit is a rule-based decision-making
20 unit.

Preferably, the transport data monitor is a software agent, operable to place itself on a predetermined node of the network.

Preferably, the system comprises a plurality of transport data monitors distributed over a plurality of points on the network.

Preferably, the transport data monitor further comprises a multimedia filter for determining whether passing content comprises
5 multimedia data and restricting the signature extraction to the multimedia data.

Preferably, the transport data comprises a plurality of protocol layers, the system further comprising a layer analyzer connected between the transport data monitor and the signature extractor, the layer analyzer comprising analyzer modules for at least two of the layers.

10 Preferably, the system comprises a traffic state associator connected to receive output from the layer analyzer modules, and to associate together output of different layer analyzer modules which belongs to a single communication.

Preferably, one of the analyzer modules comprises a multimedia
15 filter for determining whether passing content comprises multimedia data and restricting the data extraction to the multimedia data.

Preferably, one of the analyzer modules comprises a compression detector for determining whether the monitored transport data is compressed.

Preferably, the system comprises a decompressor, associated with
20 the compression detector, for decompressing the data if it is determined that the data is compressed.

Preferably, one of the analyzer modules comprises an encryption detector for determining whether the monitored transport data is encrypted.

Preferably, the encryption detector comprises an entropy measurement unit for measuring entropy of the monitored transport data.

Preferably, the encryption detector is set to recognize a high entropy as an indication that encrypted data is present.

5 Preferably, the encryption detector is set to use a height of the measured entropy as a confidence level of the encrypted data indication.

Preferably, the system comprises a format detector for determining a format of the monitored transport data.

10 Preferably, the system comprises a media player, associated with the format detector, for rendering and playing the monitored transport data as media according to the detected format, thereby to place the extracted transport data in condition for extraction of a signature which is independent of a transportation format.

15 Preferably, the system comprises a parser, associated with the format detector, for parsing the monitored transport media, thereby to place the extracted transport data in condition for extraction of a signature which is independent of a transportation format.

Preferably, the signature extractor comprises a binary function for applying to the extracted transport data.

20 Preferably, the binary function comprises at least one hash function.

Preferably, the binary function comprises a first, fast, hash function to identify an offset in the extracted transport data and a second, full, hash function for application to the extracted transport data using the offset.

Preferably, the signature extractor comprises an audio signature extractor for extracting a signature from an audio part of the extracted transport data.

Preferably, the signature extractor comprises a video signature
5 extractor for extracting a signature from a video part of the extracted transport data.

Preferably, the comparator is operable to compare the extracted signature with each one of the preobtained signatures, thereby to determine whether the monitored transport data belongs to a content source which is the
10 same as any of the signatures.

Preferably, the comparator is operable to calculate a likelihood of compatibility with each of the preobtained signatures and to output a highest one of the probabilities to an unauthorized content presence determinator connected subsequently to the comparator.

15 Preferably, the unauthorized content presence determinator is operable to use the output of the comparator to determine whether unauthorized content is present in the transport and to output a positive decision of the presence to a subsequently connected policy determinator.

Preferably, an unauthorized content presence determinator is
20 connected subsequently to the comparator and is operable to use an output of the comparator to determine whether unauthorized content is present in the transport, a positive decision of the presence being output to a subsequently connected policy determinator.

Preferably, the policy determinator comprises the rule-based decision making unit for producing an enforcement decision based on output of at least the unauthorized content presence determinator.

Preferably, the policy determinator is operable to use the rule-based
5 decision making unit to select between a set of outputs including at least some of: taking no action, performing auditing, outputting a transcript of the content, reducing bandwidth assigned to the transport, using an active bitstream interference technique, stopping the transport, not allowing printing of the content, not allowing photocopying of the content and not allow saving of the
10 content on portable media.

Preferably, the rule-based decision making unit is operable to use a likelihood of a signature identification as an input in order to make the selection.

Preferably, the system comprises an audit unit for preparing and
15 storing audit reports of transportation of data identified as corresponding to content it is desired to monitor.

Preferably, the system comprises a policy determinator connected to receive positive outcomes of the encryption determinator and to apply rule-based decision of the rule-based decision making unit to select between a set of
20 outputs including at least some of: taking no action, performing auditing, outputting a transcript of the content, reducing bandwidth assigned to the transport, using an active bitstream interference technique, stopping the transport, reducing quality of the content, removing sensitive parts, altering the

content, adding a message to the content, not allowing printing of the content, not allowing photocopying of the content and not allow saving of the content on portable media.

Preferably, the policy determinator is operable to use an input of an amount of encrypted transport from a given user as a factor in the rule based decision making.

Preferably, the system comprises a policy determinator connected to receive positive outcomes of the encryption determinator and to apply rule-based decision making of the rule-based decision-making unit to select between a set of outputs including at least some of: taking no action, performing auditing, outputting a transcript of the content, reducing bandwidth assigned to the transport, using an active bitstream interference technique, stopping the transport, reducing quality of the content, removing sensitive parts, altering the content, adding a message to the content, not allowing printing of the content, not allowing photocopying of the content, and not allowing saving of the content on portable media.

Preferably, the policy determinator is operable to use:
an input of an amount of encrypted transport from a given user, and
the confidence level,
as factors in the rule based decision making.

The system may typically be comprised within a firewall.

Preferably, the transport data monitor is operable to inspect incoming and outgoing data transport crossing the firewall.

Preferably, the system is operable to define a restricted network zone within the network by inspecting data transport outgoing from the zone.

Preferably the system provides certification recognition functionality to recognize data sources as being trustworthy and to allow data transport
5 originating from the trustworthy data sources to pass through without monitoring.

The certification recognition functionality may recognize data sources as being trustworthy and thus allow data transport originating from the trustworthy data sources to pass through with monitoring modified on the basis
10 of the data source recognition.

The certification recognition functionality may recognize data sources as being trustworthy and use that recognition to allow data transport originating from the trustworthy data sources to pass through with the decision making being modified on the basis of the data source recognition.

15 According to a third aspect of the present invention there is provided a method of monitoring for distribution of predetermined content over a network, the method comprising:

obtaining extracts of data from at least one monitoring point on the network,

20 obtaining a signature indicative of content of the extracted data,

comparing the signature with at least one of a prestored set of signatures indicative of the predetermined content,

using an output of the comparison as an indication of the presence or absence of the predetermined content.

According to a fourth aspect of the present invention there is provided a method of controlling the distribution of predetermined content over
5 a network, the method comprising:

obtaining extracts of data from at least one monitoring point on the network,

obtaining a signature indicative of content of the extracted data,

comparing the signature with at least one of a prestored set of
10 signatures indicative of the predetermined content,

using an output of the comparison in selecting an enforcement decision, and

using the enforcement decision in bandwidth management of the network.

15 Preferably, enforcement decisions for selection include at least some of taking no action, performing auditing, outputting a transcript of the content, reducing bandwidth assigned to the transport, stopping the transport, reducing quality of the content, removing sensitive parts, altering the content, adding a message to the content, using an active bitstream interference technique,
20 restricting bandwidth to a predetermined degree, not allowing printing of the content, not allowing photocopying of the content and not allowing saving of the content on portable media.

Preferably, the predetermined degree is selectable from a range extending between minimal restriction and zero bandwidth.

BRIEF DESCRIPTION OF THE DRAWINGS

5 For a better understanding of the invention and to show how the same may be carried into effect, reference will now be made, purely by way of example, to the accompanying drawings.

With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes
10 of illustrative discussion of the preferred embodiments of the present invention only, and are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the invention. In this regard, no attempt is made to show structural details of the invention in more detail than is necessary for a
15 fundamental understanding of the invention, the description taken with the drawings making apparent to those skilled in the art how the several forms of the invention may be embodied in practice. In the accompanying drawings:

Fig. 1, is a simplified conceptual illustration of a system for
20 detection of unauthorized transport of digital content using transport inspection, constructed and operative in accordance with a preferred embodiment of the present invention;

Fig. 2 is a simplified illustration of a part of the embodiment of Fig. 1, for detection of unauthorized transport of digital content, based on binary signatures;

Fig. 3 is a simplified illustration of an alternative to the part of Fig. 2, for detection of unauthorized transport of digital content, based on the signatures of the audio \ video signal;

Fig. 4 is a simplified illustration of a decision-making subsystem for use in the embodiment of Fig. 1;

Fig. 5 is a simplified illustration of a part of the system of Fig. 1, for policy enforcement using bandwidth management;

Fig. 6 is a simplified illustration of a subsystem for automatic detection of encrypted content, for use in the embodiment of Fig. 1;

Fig. 7 is a simplified block diagram of an alternative embodiment of the present invention that uses a module that filters multimedia content for further inspection;

Fig. 8 is a simplified schematic diagram of a further alternative embodiment of the present invention, which performs multi-layer analysis of data traffic and maintains coherency between the various transport layers by introducing a concept referred to herein as an atomic channel;

Fig. 9 is a simplified block diagram of a system for monitoring and control of content flow on a network according to a preferred embodiment of the present invention;

Fig. 10 is a simplified block diagram, similar to the one illustrated in figure 9, which also describes an interface to a photocopying machine according to a preferred embodiment of the present invention; and

Fig. 11 is a simplified block diagram of another embodiment of the present invention, where at least part of the monitoring and control is performed in a distributed manner.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The present embodiments deal, generally speaking, with protection against unauthorized transport by inspecting the transport in computer networks and applying methods for automatic recognition of unauthorized transport of content, preferably without interfering with rightful usage and the privacy of the users.

Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of the components set forth in the following description or illustrated in the drawings. The invention is applicable to other embodiments or of being practiced or carried out in various ways. Also, it is to be understood that the phraseology and terminology employed herein is for the purpose of description and should not be regarded as limiting.

Reference is firstly made to Figure 1, which is a simplified illustration showing a conceptual view of a system for detection of transport of unauthorized content using transport inspection according to a first embodiment of the present invention. An incoming transport 101, which can be a packet transport, but may also be of higher level, e.g., an e-mail message or an e-mail attachment, reaches an inspection point 102, where one or more binary signatures are extracted from an individual packet 1021 of said transport 101.

The inspection point may receive as inputs transport that may or may be a packet stream or any other kind of network data exchange including any other kinds of transport. Depending on the level of the transport, the complete content may be more or less easily accessible. Thus, an E-mail server
5 may have access to entire E-mails, and in many cases may even access individual attachments directly. In certain cases it may even be able to edit such e-mails. In cases where directly accessible and editable content exists, handling may include editing and /or removing and/or replacing parts of the content. The above also applies to semi-directly available content. Thus a
10 message may have MIME encoded attachments which constitute content, and which it may be able to treat in the above manner.

In cases of transport where the received transport is not segmented into packets, or is segmented in an unsuitable manner (e.g. bitstream), segmentation into packets may be achieved arbitrarily, and in such cases the
15 packets inspected at inspection point 102 would not be the packets of the received transport.

The extracted signature is compared to previously extracted illegal content signatures, which have been stored in a preferably pre-sorted database
104. The search and comparison process is performed using a signature search
20 and comparison mechanism 103. Results of the search are used as an input to unauthorized content detection subsystem 106, where an accumulated number of matches may be used to decide if the packets comprise illegal digital

content. Alternatively a quantitative measure, or an accumulation of quantitative measures of each match may be used.

Results from the unauthorized content detection subsystem may serve as inputs to a policy determinator 107, which decides, based on the current inputs and a preinstalled set of rules, to enforce a certain policy, such as to block the transport, to reduce the available bandwidth for the transport, to use active methods in order to interfere with the bitstream, only to perform auditing or not to do anything at all. Results from the policy determinator are used to define a policy that is enforced by a policy enforcement subsystem 108.

10 The policy enforcement subsystem 108 may make use of any known methods and techniques for bandwidth management in order to reduce or to stop the outgoing transport 109. Results from the policy determinator 107, the unauthorized content detection subsystem and other relevant data from the inspection point 102 may serve as inputs to an audit generator 109, which

15 prepares an audit that preferably contains details that may be considered relevant for the purposes of the audit, such as content name, source, destination, statistics on events, time, actions and others. Resulting audit reports may thereafter be stored in an audit database 110.

The policy determinator may decide, according to related information, usually gathered from the transport or content, how the inspected transport is to be handled for example should it be blocked, should it be logged, and such handling may be applied even if the transport or content is not explicitly recognized from a signature.

20

Reference is now made to Fig. 2, which is a simplified block diagram showing parts of the system of Fig. 1 in greater detail. Fig. 2 illustrates a subsystem for detection of the presence of unauthorized content, based on extracted binary signatures. The input stream, that may be the incoming packet stream, serves as an input to the payload extractor module 20211. Content identification is thereafter performed in two different ways. First of all a packet signature extractor 20212 extracts a binary signature from each packet. In a preferred embodiment the signatures are essentially the output of a hash function applied to the binary payload of the packets. The hash function is preferably efficient, but is not necessarily cryptographically secure or collision free. The size of the hashed values is preferably sufficiently large to provide information regarding the content of the packet. A preferred embodiment of the present invention uses a 64 bits CRC as a signature for packets of size 1.5Kb.

In another preferred embodiment of the present invention a fast hash is used for generating self-synchronized hits. Once a hit is located, a full hash may be calculated on a larger block using the location of the hit as an offset for the middle of a chunk being tested. The full hash should preferably be a true cryptographic hash with at least 128 bits of output. The chunk being tested should be large enough to contain significant entropy even if the file from which it is taken does not have a particularly high entropy density level. A chunk size of 256 bytes \pm 128 bytes around the hit position yields good results

while keeping the chance of losing bits across packet boundaries at reasonable levels.

In some cases, inspection of a small number of packets (or an amount of non packetized data) may not provide enough information to identify the content. For example, the representation of the logo of a certain studio in a video file may be the same for many of the movies produced by that particular studio. It is therefore possible to use information gathered from more than one packet in order to identify the content (or an equivalent significant amount of data). In certain cases a confidence level with which identification can be performed, when based on a sample of small size, may be content dependent.

In another embodiment of the present invention, a sequential decision module 2051 uses a sequential decision test E.g., the Neyman-Pearson test, in order to update successively the probability of certain content. The signatures of each packet are compared with the signatures in the database, and each match with any of the pre-stored signatures belonging to a particular content item that is represented in the database increases the likelihood that the data belongs to the matched content. The increase may be content-dependent and therefore the database may also contain content-dependent rules for likelihood updates. The total a-posteriori probability or confidence level may thereafter be estimated 20512 and the maximum a-posteriori estimator 20513 may detect the content to which the inspected data most likely belongs and output its identity and possibly the corresponding confidence level. In addition, packets can be accumulated in a buffer 20213, and the signature can thereafter

be extracted in batch mode 20214 from larger chunks of data. It is noted that the present method is less sensitive than that described previously, to variations in the parsing of the data.

The signatures thereafter may serve as inputs to the batch decision
5 module 2052, which estimates the probabilities that the examined data belongs to a certain content that is represented in the database. It is noted that a non-batch decision module can of course be used to replace the batch decision module.

The results from the batch and the sequential decision modules
10 2051, 2052 may serve as inputs to a final detection system 2053, which preferably estimates the total probability that the examined data belongs to certain content that is represented in the database. The results may serve as inputs to the audit generator 209 and policy determinator 206.

The binary representation of video, audio, still images and other
15 signals depends on the way in which it has been encoded, and therefore the binary signature database preferably includes variations that take into account the different encoding systems, in order to be efficient. However, one cannot expect to have available sample signatures for every content item for every type of encoding. It is therefore preferable to be able to identify the content in a
20 manner that does not depend upon the encoding system. Such an aim may be achieved by decoding the content first and then extracting the signature of the content directly from the decoded video and / or audio and / or still images signal itself.

In some signature schemes it is possible to extract the signature without decoding and/or decompressing the content, or using only partial basic decoding. This is due to the fact that most compression and encoding formats (usually but not always, employing lossy compression. e.g. JPEG, MPEG) are based on the same robust properties as the signature itself may be based upon. In some cases a signature can be designed for easy extraction from a specific format or set of formats.

A similar but in certain respects more complicated case arises from the use of text signatures. With text signatures, (as is often true for other domains), some pre-processing may improve the ability to recognize the signature. The pre-processing may comprise pre canonizing the input. Pre-canonizing may be considered equivalent to filtering, for example filtering out noise, low pass filtering, etc. Pre-canonizing may be applied to audio, video or still content before extracting the signature, which may be included with any the following: removing formatting information (white space, fonts, etc.) whether partly or fully, removing redundancy which may easily be changed, canonizing or correcting spelling, transforming to another (usually more compact) notation (e.g. phonetic) in which closely comparable elements may be equivalent.

A similar case arises with the handling of computer program code or raw data (e.g. spreadsheets, data files) The skilled person will appreciate that the significance of changes or alterations in such data is dramatically different than for text. For example a different spelling may cause different program

behavior. In the case of such data types, cannonization may for example consist of removing comments and generally consists of semi-intelligently parsing the content.

As discussed above, there are several methods for extracting
5 signatures, and each method may be used alone. In addition it is possible to use different combinations of the extraction methods to extract useful information, and in such a case the most useful result over all the different methods is accepted. In an alternative embodiment, information from the different methods may be combined to produce an overall signature.

10 Reference is now made to Fig. 3, which is a simplified block diagram showing schematically an arrangement for carrying out content identification based on a video and / or audio signature. The input stream 301 arrives in packet form (or other suitable form), from which the content or payload is extracted by a payload extractor 30211 and is accumulated at a
15 buffer 30213. The format of the content is thereafter identified at a format identifier 303, using information from the payload and/or from packet headers. If the content is compressed using a standard compression system e.g., "zip", the content is first opened or uncompressed using a decompressor 3031.

Following opening, there are two preferred possibilities for
20 proceeding: A first possibility is to extract parameters directly from the bitstream using a parser 305. A second possibility is to render the content using a multimedia player 306. In preferred embodiments both possibilities are

provided and a decision as to which of the two to use in any given instance is preferably taken based on the content type.

The content signature is extracted using the relevant signature extraction module, 306 or 307. The extracted signatures are thereafter
5 compared with signatures in the corresponding databases 310 and 311 using the respective comparison and search modules 308 and 309. Methods for obtaining signatures of the original content and performing searches are described, e.g., in US patents 6,125,229, 5,870,754 and 5,819,286, the contents of which are hereby incorporated by reference.

10 Preferably, the signature comparison yields probabilities that the content belongs to any of the contents represented in the database. Such probabilities are thereafter estimated for each of the signatures or for a subset of the signatures by probability estimator 312 and a most likely content item is identified using the maximum likelihood estimator 313.

15 Since the extraction and the comparison of binary signatures is far more simple than the extraction and the comparison of audio and video signatures, the above identification method will, in general, be employed only if the suspected content has not been identified using binary signatures as described above in respect of Fig. 1.

20 Reference is now made to Fig. 4, which is a simplified block diagram of the policy enforcement subsystem 107 of Fig. 1. The policy enforcement subsystem 107 receives as input the identification of unauthorized content that was found in previous stages, together with a corresponding

confidence level. Decision system 4061 uses a rule-set 4062 in order to take into consideration various parameters, such as the confidence level. Thus for example a very simple rule based on the confidence level may be as follows:

- for low confidence level – take no action,
- 5 • for intermediate confidence level – allow transport with a reduced bandwidth, where the bandwidth reduction depends on the confidence level, and
- for high confidence level, completely stop the transport.

10 Sometimes it may be possible to only stop part of the transport (e.g. an E-mail attachment) or to edit some of its contents (e.g. reduce the quality of copyrighted material).

Another parameter that may be taken into account is the content identity itself, as certain content items may be of more concern than others. For
15 example, a particular publisher may be highly concerned about distribution of a content item at an early stage of illegal distribution, or may be particularly concerned to stop the distribution of a content item whose production required a large amount of money or has only recently been released. Other factors to be considered may include a desire to give the system of the present embodiments
20 a low profile in order to reduce the probability of counter measures, to protect the credentials of the source and the destination of the transport etc.

One possible final decision of the system may be to completely stop the transport whether immediately or after crossing a threshold such as a time

threshold. Another possibility is to allow the transport to continue with reduced bandwidth, and another possible decision is to take no action and to allow the transport to proceed as usual. After the decision, the corresponding allocated bandwidth is preferably attached to the packets, typically in a packet header. The decision, in terms of an allocated bandwidth, may serve as an input to a bandwidth management system 407 and to an audit generator 409.

Once a bandwidth level or a priority or any other form of decision has been allocated, the system may make use of any one of various bandwidth management tools in order to execute the policy, e.g., the methods described in US patents 6,046,980, 6,085,241, 5,748,629, 5,638,363 and 5,533,009, the contents of which are hereby incorporated by reference.

Reference is now made to Fig. 5, which is a simplified schematic illustration of a subsystem for policy enforcement using a standard bandwidth management tool. Input packets (or an equivalent suitable format in a suitable medium), possibly carrying indications of a corresponding allocated bandwidth, serve as an input to a priority allocator 5071, which preferably determines either the order in which the packet enters a queue 5073 for output, or the order in which the packets leave the queue 5074 for output. The packets preferably leave the queue at a rate that corresponds to the allocated bandwidth, and reach the interface to the transport layer 5075 and then the transport layer itself -5076.

The above-described embodiments provide a solution for content that is not encrypted. However, unauthorized users may easily circumvent the

above system using standard encryption methods. Very strong cryptographic software is prevalent on the Internet, and it is practically impossible to decrypt such content without having a respective decryption key. Reference is now therefore made to Fig. 6, which is a simplified block diagram illustrating a

5 subsystem for detection of encrypted content. The subsystem preferably determines the presence of encrypted content on the basis of information in the packet header and on the statistics of the payload. In many cases e.g., SSL and TLS, the headers contain information about the encryption method, and identification of the encrypted content can be done based on the header

10 information alone. A format identifier 703 is accordingly provided to carry out identification of such information in the header. In other cases, the statistics of the payload may be used in order to determine whether the content is encrypted or not. In general, properly encrypted data tends to have a statistical distribution of maximal entropy, which is to say minimal redundancy. Thus an

15 entropy measurement can be used as an indication of the presence of encrypted data. In order to carry out an entropy measurement, a portion of the content is accumulated in a buffer / accumulator 70213. An encoding format, if indicated in the header information, is identified by the format identifier 703. If the content has been compressed using a standard (usually lossless) compression

20 method, e.g. "zip", then it may first be decoded using a multi-format lossless compression decoder (or a decoder for the specific format) 7031. The statistics of the content is thereafter analyzed using a statistical analyzer 704 and the entropy of the bitstream is estimated 7041. Detection of encrypted content and

a corresponding confidence level for that detection are thereafter estimated using standard statistical tests for randomness, possibly taking into account inputs from the format identifier.

In some cases the above analysis can be done without decompressing the file, usually based on the fact that most lossless compression algorithms are based on entropy considerations for bit allocation and similar concerns.

The policy determinator 706, which may be the same as policy determinator 106 in Fig. 1, preferably uses inputs including the encrypted content detection decision with the rules in the rule set 7061 in order to determine a corresponding enforcement policy.

In general, encrypted content that corresponds to legitimate transportation between ordinary users is expected to be of significantly smaller volume than the transportation volume that is used while exchanging illegitimate video content and multiple audio content. So a reasonable policy, that can reduce transportation of unauthorized multimedia content, with minimal interference to legitimate users, would be to allow a constant quota for encrypted transport, for example a few Mbs for an ordinary user. If the quota is exceeded then the allocated bandwidth may be significantly reduced or, alternatively, an extra charge may be levied.

Note that for many applications a more selective approach may be taken, for example, in the case of sensitive confidential content, bandwidth is

not generally a consideration, and the primary decision is whether to allow or to block the transport

Reference is now made to Fig. 7, which is a simplified block diagram of a further embodiment of the present invention. The embodiment of Fig. 7 is similar to that of Fig. 1, but additionally comprises a multimedia detector 70211 that filters arriving packets for multimedia content. As a result of the application of the filter, it is possible to isolate the multimedia content for inspection for binary signatures etc., thereby reducing the load on consequent stages. Detection of multimedia content is preferably carried out on the basis of the information in the file, packet or other entity header.

The multimedia detector 70211 is preferably located at an inspection point 702. The inspection point 702 is preferably otherwise identical to the inspection point 102 of Fig. 1. The remainder of Fig. 7 is the same as Fig. 1 and will not be described again.

Reference is now made to Fig. 8, which is a simplified schematic diagram showing an arrangement for inspecting traffic content over a variety of protocol layers. In general, network traffic may be addressed in various layers. The standard ISO OSI(open system architecture reference model) introduces seven protocol layers: physical, data-link, network, transport, session, presentation and application. In order to gather more information and to increase the reliability of the analysis, traffic analysis may be performed at several of the protocol layers. However, having analysis results from different layers raises a problem known as the association problem, namely how to

gather the different analysis results from the various layers and associate them together to draw conclusions regarding transfer of possibly unauthorized content.

In order to deal with the above-described association, a preferred
5 embodiment of the present invention introduces a concept, which is referred to herein by the term *atomic channel*. Generally, a single communication between two parties may comprise one or more links and numerous data and control packets. The atomic channel is the single communication comprising all of these parts. Information in the various packet headers, at different levels
10 or layers of the transport protocol allows the different packets (or other elements) of a single communication to be associated together. In order to achieve such an association an atomic channel is given a *traffic state* which enables it to achieve the above-mentioned association, as will be described in more detail below. A simple atomic channel may, for example, be a single
15 TCP connection. The skilled person will of course be aware that in many current file sharing schemes the TCP connections are considered sub atomic, for example in an FTP transfer, two such connections, DATA and CONTROL, are used, the two connections together forming one atomic channel. More complex examples include file-sharing networks, where monitored connections
20 may contain information pertaining to many transfers, between many users, none of the users being on either end of the connection. Furthermore, multiple unrelated, monitored, connections may contain information about a single transfer. The information in all of the unrelated connections may thus need to

be correlated in order to obtain information about the transfer, and such correlation may need to be carried out in an uncertain or untrustworthy environment. The uncertainty may be due to incomplete monitoring, or efforts by the designers or users of the network to thwart monitoring of the network.

5 In the example of a single TCP connection, the participants' IP addresses may be gathered from layer 3 information. Layer 4 information may be used to determine information about a second stream, that is to say to find signs of use of a two way channel, so that the entire interaction may, according to the situation, be completely reconstructed. In other circumstances,
10 fragments of the streams may be reconstructed. The skilled person will be aware that state information is important, both to construct the streams, and to correlate them with each other. State information may be especially useful as a basis for understanding connection negotiation information, which may be, and preferably often is, analyzed as higher OSI layer information. For example in
15 the case of an FTP transfer, the control information stream may be used to attach a file name and location to the transferred file and may be used to discern between numerous files. In the case of a complex file-sharing network, high-layer state information may be used to correlate between high-layer messages of the network, additional information may be used to discern the
20 contents encoding, or encryption if present. Such additional information may be taken from layers 5 and 6 and sometimes from layer 7, particularly in the case of a virtual file-sharing network.

In cases such as that of a peer-to-peer network, alternatively or additionally to using the above-described atomic channel, information may be gathered about separable but possibly unrecognizable entities. Thus, over the course of the monitoring, enough information may be gathered to obtain a
5 meaningful notion of the transfer, and/or on the structure and/or of the aforementioned entities.

Returning to Fig. 8, there is illustrated therein an arrangement for carrying out multi-layer inspection of a transport protocol. Two-way or sometimes multi-way traffic 801 may be gathered from a point or agent on the
10 network being monitored. The system preferably makes use of a plurality of monitoring agents situated at strategic locations on the network. The gathered data is analyzed by multi-layer analyzer 802. The analysis may be performed in OSI layers 1-7 or part thereof, using layer specific data analyzers 8023-8027. The skilled person will appreciate that layer 1 may be relevant only in hardware
15 implementations. The skilled person will be aware that the present embodiment is merely exemplary and that different file transfer networks may use other transport models such as an encapsulated transport layer over the application layer.

Results from the layer specific analyzers preferably reach traffic
20 state associator 8020 in disorganized fashion, meaning that results from different layers for different communication channels are all mixed up together. The traffic state associator determines which results belong together with which other results and traffic analysis results that correspond to any given

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IL02/00037

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G06F 15/178

US CL : 709/224

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 709/224

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	US 6,327,677 B1 (GARG et al.) 04 December 2001, see col. 2, line 38 to col. 16, line 63.	1-17,34-36,6 9-79,86-87,109-110
A	US 6,076,105 A (WOLFF et al.) 13 June 2000, see col. 6, line 15 to col. 24, line 65).	1-112
A	US 5,870,744 A (SPRAGUE) 09 February 1999, see col. 2, line 50 to col. 9, line 67.	1-112
A,P	US 6,282,175 B1 (STEELE et al.) 28 August 2001, see the whole reference.	1-112
A,E	US 6,370,574 B1 (HOUSE et al.) 09 April 2002, see the whole reference.	1-112



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"G"	document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

14 MAY 2002

Date of mailing of the international search report

05 JUN 2002

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

ZARNI MAUNG

Telephone No. 703-305-3900

communication channel are associated together by being assigned with a specific state channel. The data, thus arranged channel wise, preferably serves as input to the traffic analysis system 803 which is similar to the traffic analysis systems described above, and results from the traffic analysis system preferably
5 serve as input to decision system 806 to be used in decision making regarding enforcement policy, for carrying out by the traffic control system 807.

It is noted that many of the elements specified hereinabove, may, , be omitted partially or entirely from any specific implementation. For example: a specific application may omit the rule base or exchange it for a
10 constant behavior logic.

It is pointed out that the above described embodiments, or variations thereof, are applicable to other similar fields, and not only to copyright protection, and protection of other sensitive or confidential material. For example, such a variation may be used to create automatic transcripts of
15 communications over a virtual or high layer messaging network, where other communications which the law enforcement agency is not authorized to intercept i.e. other communication types, modes or communication between law abiding individuals are intercepted by a sniffing or like mechanism. That is to say the system could be used to inspect all transport on the network and
20 report to the law enforcement agency only the information that it is authorized to intercept.

Other fields of application may include analysis of complex distributed system behavior, for example the debugging of shared memory used in a distributed system, or for networking research purposes.

The above embodiments thereby provide a powerful tool that can be
5 used for other purposes as well: e.g., in order to monitor outgoing transport from a restricted zone such as a local area network of a corporate organization. The organization may be concerned that industrially sensitive information is being sent out via the network. In such a case, a system similar to the system illustrated in Fig. 1, with a database of signatures of confidential or otherwise
10 restricted materials may be used in order to identify and possibly block the transport of the materials. Such an implementation is useful since the present peer-to-peer networks effectively create an alternative internet that renders many of the current standard firewall techniques ineffective.

The present embodiments, or variations thereof may also be used in
15 combination with certifications methods and techniques in order to allow un-inspected, un-restricted or otherwise privileged usage to certificated users. Such certification is useful in reducing the load on the system.

The present invention may also be used in order to accumulate consumption statistics and / or other useful statistical analysis of the analyzed
20 transport.

Reference is now made to Fig. 9, which is a simplified block diagram of a series of network elements and showing a system for controlling the distribution of predetermined content over a network, according to a

preferred embodiment of the present invention. The system comprises a series of elements, including a central control 910, and one or more of the following inspection/monitoring points: an internal mail server 920, an external mail server 930, a LAN 940, an external traffic router 950, a web proxy 960, a firewall 970 and an FTP proxy 980. The system is able to monitor passing traffic at various of the above mentioned elements in the network. For example, while monitoring traffic within a corporate network, the system may monitor the traffic in one or more of the following entities: the external mail server 930 the external traffic router 950, the web proxy 960, the firewall 970, the FTP proxy 980 and the print server 990 etc. At each point, extracts of data may be obtained using respective monitors of the entity (9201, 9301, 9401, 9501, 9601, 9701, 9801 and 9901) Signatures are then extracted from the data in any of the ways explained above and transferred to the central control of the monitoring system 910. The signatures are then analyzed by the signature analyzer 9101 and compared with stored signatures to determine whether the monitored transport shows any significant level of correspondence with any of the content items represented by the stored signatures. The level of comparison may be determined by the policy manager 9102. It is pointed out that the correspondence does not have to be determined on the basis of individual signature comparison, e.g., multimedia content items are usually long, and individual parts of entirely unrelated items may be identical. However, in some of the more sensitive content items, even a relatively short portion of the content may be sensitive, and the policy manager should preferably contain

information allowing the identification of such portions. Thus the comparison is preferably carried out in batch fashion or in serial cumulative fashion as described above. The output of the analysis and comparison is then used by the policy manager 9102 in order to determine which action will be taken: e.g.,
5 blocking transport, not allowing printing of the document, auditing, reducing available bandwidth, automatically sending a message to the offender, instructing, when possible, the monitoring entity (especially in the case of an E-mail server, and the various proxies), to change the content (e.g. to remove sensitive parts, reduce the quality of copyrighted material, to add a textual or
10 other copyright warning, etc.) etc...

In a preferred embodiment of the present invention, printer servers 990 and / or printers 9902 may include monitoring and control 9901 of printer jobs, preferably with an ability to block or modify printer jobs, in order to prevent unauthorized printing of sensitive documents.

15 Note that the concept of the atomic channel described above may consist of utilizing data from several such sources in order to form the information of such a specific channel. For example, peer-to-peer traffic may utilize Web, E-mail or FTP transport facilities for the actual transport, but may use TCP to search for files.

20 It is also pointed out that control, either direct as described in Fig. 9, or indirect through configuration or otherwise, of the firewall and similar entities (e.g., VPN server, etc.) may consist of instructing it to prevent circumvention of the other monitoring entities, e.g. force Web, E-mail and FTP

traffic to use the monitored proxies and servers. Furthermore, encapsulated traffic that tries to circumvent those entities by the usage of encapsulation can be detected, and thereby blocked, monitored or redirected, by the multi-level inspection methods described above. In another embodiment of the present invention, the policy manager 9102 preferably instructs the monitoring entity to attempt to remove hidden messages (steganograms) by using methods that do not require the identification of the hidden messages to be removed. Such methods may be as simple as adding noise or other slight distortions to the content part of the file. A slight distortion of the content part of the file is generally sufficient to destroy the steganogram without affecting the legitimate content. Another method may comprise embedding a possibly random steganogram that renders any underlying original message unreadable.

Reference is now made to Fig. 10, wherein there is illustrated a further embodiment of the system described in Fig. 9, specifically for preventing copying of classified documents using a photocopy machine. In this embodiment, a central control of a monitoring system 1010 is connected to a controller 10951 of copy machine 1095. Many modern copy machines contain a scanner that transforms the copied document into a digital image. The textual content of the document may be extracted from the digital image using a standard Optical Character Recognition (OCR) technique. After extraction, the textual content or derivatives thereof can be analyzed using a signature analyzer 10101 in order to determine whether the content comprises an unauthorized document. The output of the analysis is then used by a policy

manager 10102 in order to determine whether to take action and if so, what action: e.g., not allowing photocopying of the document, auditing, sending a message to the offender, etc.

It is pointed out that signature extraction may be carried out in a centralized manner in the signature analyzer 9101/10101, or may alternatively
5 be carried out in a distributed fashion, for example in the various monitors. The latter may advantageously reduce communications because the extracted signatures are smaller than the original content. Furthermore, signature caching and other similar methods may be carried out in the distributed entities to
10 further reduce communication volume and thereby enhance performance.

Reference is now made to Fig. 11, which is a simplified block diagram illustrating a further embodiment of the present invention which utilizes local monitoring and control located in user stations. The local monitor/control 11971 may be based on a software (or hardware) agent that
15 resides within user stations 1197. The local monitor/control 11971 may include a local database 119711. In a preferred embodiment, the monitor may detect events such as printing, saving to portable media (e.g. diskettes), use of the "print screen" command etc..., and may analyze content sent (e.g., via the local printer controller 119721, via the portable media controller 119712, "print
20 screen" controller etc...). If it turns out that there was an attempt at unauthorized printing or saving of unauthorized material to portable media etc..., then the local monitor & control 11971 unit may report the details to the central control 1110. The policy manager 11102 may thereafter select an action

to be taken and may send a message, or other indication accordingly, to the local control 119711, which thereafter may use the controllers 119712 and 119721 in order to execute the policy. It is noted that in order to prevent malicious tampering with the locally based software agent referred to above, 5 tamper resistance methods may be used. It is further noted that both hardware and software tamper resistance solutions are available. Generally, software solutions are the most easily manageable, however the hardware solutions are usually more robust.

It is noted that the distributed nature of the system may require 10 automatic or pseudo-automatic updating of the distributed components.

It is further noted that encryption and authentication may be used in communications between elements in order to secure the communications.

It is appreciated that one or more steps of any of the methods described herein may be implemented in a different order than that shown, 15 while not departing from the spirit and scope of the invention.

While the methods and apparatus disclosed herein may or may not have been described with reference to specific hardware or software, the methods and apparatus have been described in a manner sufficient to enable persons of ordinary skill in the art to readily adapt commercially available 20 hardware and software as may be needed to reduce any of the embodiments of the present invention to practice without undue experimentation and using conventional techniques.

A number of features have been shown in various combinations in the above embodiments. The skilled person will appreciate that the above combinations are not exhaustive, and all reasonable combinations of the above features are hereby included in the present disclosure.

5 While the present invention has been described with reference to a few specific embodiments, the description is intended to be illustrative of the invention as a whole and is not to be construed as limiting the invention to the embodiments shown. It is appreciated that various modifications may occur to those skilled in the art that, while not specifically shown herein, are
10 nevertheless within the true spirit and scope of the invention.

Claims:

1. A system for network content monitoring, comprising:
a transport data monitor, connectable to a point in a network, for
5 monitoring data being transported past said point,
a description extractor, associated with said transport data monitor,
for extracting descriptions of said data being transported,
a database of at least one preobtained description of content whose
movements it is desired to monitor, and
10 a comparator for determining whether said extracted description
corresponds to any of said at least one preobtained descriptions, thereby to
determine whether said data being transported comprises any of said content
whose movements it is desired to monitor.
- 15 2. A system according to claim 1, wherein said description extractor
is operable to extract a pattern identifiably descriptive of said data being
transported.
- 20 3. A system according to claim 1, wherein said description extractor
is operable to extract a signature of said data being transported.
4. A system according to claim 1, wherein said description extractor
is operable to extract characteristics of said data being transported.

5. A system according to claim 1, wherein said description extractor
is operable to extract encapsulated meta information of said data being
transported.

5

6. A system according to claim 1, wherein said description extractor
is operable to extract multi-level descriptions of said data being transported.

7. A system according to claim 6, wherein said multi-level
10 description is comprises of a pattern identifiably descriptive of said data being
transported.

8. A system according to claim 6, wherein said multi-level
description is comprises a signature of said data being transported.

15

9. A system according to claim 6, wherein said multi-level
description comprises characteristics of said data being transported.

10. A system according to claim 6, wherein said multi-level
20 description comprises encapsulated meta-information of said data being
transported.

11. A system according to claim 1, wherein said description extractor is a signature extractor, for extracting a derivation of said data, said derivation being a signature indicative of content of said data being transported, and wherein said at least one preobtained description is a preobtained signature.

5

12. A system according to claim 1, said network being a packet-switched network and said data being transported comprising passing packets.

10

13. A system according to claim 1, said network being a packet-switched network, said data being transported comprising passing packets and said transport data monitor being operable to monitor header content of said passing packets.

15

14. A system according to claim 1, said network being a packet-switched network, said data being transported comprising passing packets, and said transport data extractor being operable to monitor header content and data content of said passing packets.

20

15. A system according to claim 1, wherein said transport data monitor is a software agent, operable to place itself on a predetermined node of said network.

16. A system according to claim 1, comprising a plurality of transport data monitors distributed over a plurality of points on said network.
17. A system according to claim 1, said transport data monitor further comprising a multimedia filter for determining whether passing content comprises multimedia data and restricting said signature extraction to said multimedia data.
18. A system according to claim 1, said data being transported comprising a plurality of protocol layers, the system further comprising a layer analyzer connected between said transport data monitor and said signature extractor, said layer analyzer comprising analyzer modules for at least two of said layers.
19. A system according to claim 18, said layer analyzer comprising separate analyzer modules for respective layers.
20. A system according to claim 18, further comprising a traffic associator, connected to said analyzer modules, for using output from said analyzer modules to associate transport data from different sources as a single communication.

21. A system according to claim 20, wherein said sources are at least one of a group comprising: data packets, communication channels, data monitors, and pre correlated data.

5 22. A system according to claim 18, comprising a traffic state associator connected to receive output from said layer analyzer modules, and to associate together output, of different layer analyzer modules, which belongs to a single communication.

10 23. A system according to claim 18, wherein at least one of said analyzer modules comprises a multimedia filter for determining whether passing content comprises multimedia data and restricting said signature extraction to said multimedia data.

15 24. A system according to claim 18, wherein at least one of said analyzer modules comprises a compression detector for determining whether said extracted transport data is compressed.

20 25. A system according to claim 24, further comprising a decompressor, associated with said compression detector, for decompressing said data if it is determined that said data is compressed.

26. A system according to claim 24, further comprising a description extractor for extracting a description directly from said compressed data.

5 27. A system according to claim 18, wherein at least one of said analyzer modules comprises an encryption detector for determining whether said transport data is encrypted.

28. A system according to claim 27, wherein said encryption
10 detector comprises an entropy measurement unit for measuring entropy of said monitored transport data.

29. A system according to claim 28, wherein said encryption
detector is set to recognize a high entropy as an indication that encrypted data
15 is present.

30. A system according to claim 29, wherein said encryption
detector is set to use a height of said measured entropy as a confidence level of
said encrypted data indication.

20

31. A system according to claim 18, further comprising a format detector for determining a format of said monitored transport data.

32. A system according to claim 31, further comprising a media player, associated with said format detector, for rendering and playing said monitored transport data as media according to said detected format, thereby to place said monitored transport data in condition for extraction of a signature which is independent of a transportation format.

33. A system according to claim 31, further comprising a parser, associated with said format detector, for parsing said monitored transport media, thereby to place said monitored transport data in condition for extraction of a signature which is independent of a transportation format.

34. A system according to claim 1, comprising a payload extractor located between said transport monitor and said signature extractor for extracting content carrying data for signature extraction.

15

35. A system according to claim 1, wherein said signature extractor comprises a binary function for applying to said monitored transport data.

20

36. A system according to claim 1, wherein said network is a packet network, and wherein a buffer is associated with said signature extractor to enable said signature extractor to extract a signature from a buffered batch of packets.

37. A system according to claim 35, wherein said binary function comprises at least one hash function.

5 38. A system according to claim 37, wherein said binary function comprises a first, fast, hash function to identify an offset in said monitored transport data and a second, full, hash function for application to said monitored transport data using said offset.

10 39. A system according to claim 11, wherein said signature extractor comprises an audio signature extractor for extracting a signature from an audio part of said monitored data being transported.

40. A system according to claim 11, wherein said signature
15 extractor comprises a video signature extractor for extracting a signature from a video part of said monitored data being transported.

41. A system according to claim 11, said signature extractor
comprising a pre-processor for pre-processing said monitored data being
20 transported to improve signature extraction.

42. A system according to claim 41, said preprocessor operable to carry out at least one of a group of pre-processing operations

comprising: removing erroneous data, removing redundancy, and canonizing properties of said monitored data being transported.

43. A system according to claim 11, wherein said signal
5 extractor comprises a binary signal extractor for initial signature extraction and an audio signature extractor for extracting an audio signature in the event said initial signature extraction fails to yield an identification.

44. A system according to claim 11, wherein said signal
10 extractor comprises a binary signal extractor for initial signature extraction and a text signature extractor for extracting a text signature in the event said initial signature extraction fails to yield an identification.

45. A system according to claim 11, wherein said signal
15 extractor comprises a binary signal extractor for initial signature extraction and a code signature extractor for extracting a code signature in the event said initial signature extraction fails to yield an identification.

46. A system according to claim 11, wherein said signal
20 extractor comprises a binary signal extractor for initial signature extraction and a data content signature extractor for extracting a data content signature in the event said initial signature extraction fails to yield an identification.

47. A system according to claim 11, wherein said signature extractor is operable to use a plurality of signature extraction approaches.

48. A system according to claim 47, further comprising a
5 combiner for producing a combination of extracted signatures of each of said approaches.

49. A system according to claim 47, wherein said comparator
is operable to compare using signatures of each of said approaches and to use
10 as a comparison output a highest result of each of said approaches.

50. A system according to claim 11, wherein said signal
extractor comprises a binary signal extractor for initial signature extraction and
a video signature extractor for extracting a video signature in the event said
15 initial signature extraction fails to yield an identification.

51. A system according to claim 11, wherein there is a
plurality of preobtained signatures and wherein said comparator is operable to
compare said extracted signature with each one of said preobtained signatures,
20 thereby to determine whether said monitored transport data belongs to a content
source which is the same as any of said signatures.

52. A system according to claim 51, said comparator being operable to obtain a cumulated number of matches of said extracted signature.

53. A system according to claim 51, wherein said comparator
5 is operable to calculate a likelihood of compatibility with each of said preobtained signatures and to output a highest one of said probabilities to an unauthorized content presence determinator connected subsequently to said comparator.

10 54. A system according to claim 52, said comparator being operable to calculate a likelihood of compatibility with each of said preobtained signatures and to output an accumulated total of matches which exceed a threshold probability level.

15 55. A system according to claim 52, said comparator being operable to calculate the likelihood of compatibility with each of said preobtained signatures and to output an accumulated likelihood of matches which exceed a threshold probability level.

20 56. A system according to claim 51, comprising a sequential decision unit associated with said comparator, being operable to use a sequential decision test to update a likelihood of the presence of given content, based on at least one of the following: successive matches made by said

comparator, context related parameters, other content related parameters and outside parameters.

57. A system according to claim 53, wherein said
5 unauthorized content presence determinator is operable to use the output of said
comparator to determine whether unauthorized content is present in said
transport and to output a positive decision of said presence to a subsequently
connected policy determinator.

10 58. A system according to claim 51, wherein an unauthorized
content presence determinator is connected subsequently to said comparator
and is operable to use an output of said comparator to determine whether
unauthorized content is present in said data being transported, a positive
decision of said presence being output to a subsequently connected policy
15 determinator.

59. A system according to claim 58, wherein said policy
determinator comprises a rule-based decision making unit for producing an
enforcement decision based on output of at least said unauthorized content
20 presence determinator.

60. A system according to claim 1, wherein said policy
determinator is operable to use said rule-based decision making unit to select

between a set of outputs including at least some of: taking no action,
performing auditing, outputting a transcript of said content, reducing bandwidth
assigned to said transport, using an active bitstream interference technique,
stopping said transport, preventing printing, preventing photocopying, reducing
5 quality of the content, removing sensitive parts, altering the content, adding a
message to the said content, and preventing of saving on a portable medium,

61. A system according to claim 60, wherein said rule-based
decision making unit is operable to use a likelihood level of a signature
10 identification as an input in order to make said selection.

62. A system according to claim 61, further comprising a
bandwidth management unit connected to said policy determinator for
managing network bandwidth assignment in accordance with output decisions
15 of said policy determinator.

63. A system according to claim 1, further comprising an audit
unit for preparing and storing audit reports of transportation of data identified
as corresponding to content it is desired to monitor.

20

64. A system according to claim 1, comprising a transcript
output unit for producing transcripts of content identified by said comparison.

65. A system according to claim 27, further comprising a policy determinator connected to receive outcomes of said encryption determinator and to apply rule-based decision making to select between a set of outputs including at least some of: taking no action, performing auditing,
5 outputting a transcript of said content, reducing bandwidth assigned to said transport, using an active bitstream interference technique, and stopping said transport.

66. A system according to claim 65, wherein said rule-based
10 decision-making comprises rules based on confidence levels of said outcomes.

67. A system according to claim 65, wherein said policy determinator is operable to use an input of an amount of encrypted transport from a given user as a factor in said rule based decision making.
15

68. A system according to claim 30, further comprising a policy determinator connected to receive positive outcomes of said encryption determinator and to apply rule-based decision making to select between a set of outputs including at least some of: taking no action, performing auditing,
20 outputting a transcript of said content, reducing bandwidth assigned to said transport, using an active bitstream interference technique, and stopping said transport, said policy determinator operable to use:

an input of an amount of encrypted transport from a given user, and

said confidence level, as factors in said rule based decision making.

69. A system for network content control, comprising:

a transport data monitor, connectable to a point in a network, for
5 monitoring data being transported past said point,
a signature extractor, associated with said transport data monitor, for
extracting a derivation of payload of said monitored data, said derivation being
indicative of content of said data,
a database of preobtained signatures of content whose movements it
10 is desired to monitor,
a comparator for comparing said derivation with said preobtained
signatures, thereby to determine whether said monitored data comprises any of
said content whose movements it is desired to control,
a decision-making unit for producing an enforcement decision, using
15 the output of said comparator, and
a bandwidth management unit connected to said decision-making
unit for managing network bandwidth assignment in accordance with output
decisions of said policy determinator, thereby to control content distribution
over said network.

20

70. A system according to claim 69, wherein said decision-making unit is a rule-based decision-making unit.

71. A system according to claim 70, wherein said transport data monitor is a software agent, operable to place itself on a predetermined node of said network.

5 72. A system according to claim 70, comprising a plurality of transport data monitors distributed over a plurality of points on said network.

73. A system according to claim 70, said transport data monitor further comprising a multimedia filter for determining whether passing
10 content comprises multimedia data and restricting said signature extraction to said multimedia data.

74. A system according to claim 70, said transport data comprising a plurality of protocol layers, the system further comprising a layer
15 analyzer connected between said transport data monitor and said signature extractor, said layer analyzer comprising analyzer modules for at least two of said layers.

75. A system according to claim 74, comprising a traffic state
20 associator connected to receive output from said layer analyzer modules, and to associate together output of different layer analyzer modules which belongs to a single communication.

76. A system according to claim 74, one of said analyzer modules comprising a multimedia filter for determining whether passing content comprises multimedia data and restricting said data extraction to said multimedia data.

5

77. A system according to claim 74, one of said analyzer modules comprising a compression detector for determining whether said monitored transport data is compressed.

10

78. A system according to claim 77, further comprising a decompressor, associated with said compression detector, for decompressing said data if it is determined that said data is compressed.

15

79. A system according to claim 74, one of said analyzer modules comprising an encryption detector for determining whether said monitored transport data is encrypted.

20

80. A system according to claim 79, wherein said encryption detector comprises an entropy measurement unit for measuring entropy of said monitored transport data.

81. A system according to claim 80, said encryption detector being set to recognize a high entropy as an indication that encrypted data is present.

5 82. A system according to claim 81, said encryption detector being set to use a height of said measured entropy as a confidence level of said encrypted data indication.

83. A system according to claim 74, further comprising a
10 format detector for determining a format of said monitored transport data.

84. A system according to claim 83, further comprising a media player, associated with said format detector, for rendering and playing said monitored transport data as media according to said detected format,
15 thereby to place said extracted transport data in condition for extraction of a signature which is independent of a transportation format.

85. A system according to claim 83, further comprising a parser, associated with said format detector, for parsing said monitored
20 transport media, thereby to place said extracted transport data in condition for extraction of a signature which is independent of a transportation format.

86. A system according to claim 70, wherein said signature extractor comprises a binary function for applying to said extracted transport data.

5 87. A system according to claim 86, wherein said binary function comprises at least one hash function.

88. A system according to claim 87, wherein said binary function comprises a first, fast, hash function to identify an offset in said
10 extracted transport data and a second, full, hash function for application to said extracted transport data using said offset.

89. A system according to claim 70, wherein said signature extractor comprises an audio signature extractor for extracting a signature from
15 an audio part of said extracted transport data.

90. A system according to claim 70, wherein said signature extractor comprises a video signature extractor for extracting a signature from a
video part of said extracted transport data.

20

91. A system according to claim 70, wherein said comparator is operable to compare said extracted signature with each one of said

preobtained signatures, thereby to determine whether said monitored transport data belongs to a content source which is the same as any of said signatures.

92. A system according to claim 91, wherein said comparator
5 is operable to calculate a likelihood of compatibility with each of said preobtained signatures and to output a highest one of said probabilities to an unauthorized content presence determinator connected subsequently to said comparator.

10 93. A system according to claim 92, wherein said unauthorized content presence determinator is operable to use the output of said comparator to determine whether unauthorized content is present in said transport and to output a positive decision of said presence to a subsequently connected policy determinator.

15 94. A system according to claim 91, wherein an unauthorized content presence determinator is connected subsequently to said comparator and is operable to use an output of said comparator to determine whether unauthorized content is present in said transport, a positive decision of said
20 presence being output to a subsequently connected policy determinator.

95. A system according to claim 94, wherein said policy determinator comprises said rule-based decision making unit for producing an

enforcement decision based on output of at least said unauthorized content presence determinator.

96. A system according to claim 70, wherein said policy
5 determinator is operable to use said rule-based decision making unit to select between a set of outputs including at least some of: taking no action, performing auditing, outputting a transcript of said content, reducing bandwidth assigned to said transport, using an active bitstream interference technique, stopping said transport, not allowing printing of said content, not allowing
10 photocopying of said content and not allow saving of said content on portable media.

97. A system according to claim 96, said rule-based decision making unit is operable to use a likelihood of a signature identification as an
15 input in order to make said selection.

98. A system according to claim 70, further comprising an audit unit for preparing and storing audit reports of transportation of data identified as corresponding to content it is desired to monitor.

20

99. A system according to claim 79, further comprising a policy determinator connected to receive positive outcomes of said encryption determinator and to apply rule-based decision of said rule-based decision

making unit to select between a set of outputs including at least some of: taking
no action, performing auditing, outputting a transcript of said content, reducing
bandwidth assigned to said transport, using an active bitstream interference
technique, stopping said transport, reducing quality of the content, removing
5 sensitive parts, altering the content, adding a message to said content, not
allowing printing of said content, not allowing photocopying of said content
and not allow saving of said content on portable media.

100. A system according to claim 99, said policy determinator
10 being operable to use an input of an amount of encrypted transport from a
given user as a factor in said rule based decision making.

101. A system according to claim 82, further comprising a
policy determinator connected to receive positive outcomes of said encryption
15 determinator and to apply rule-based decision making of said rule-based
decision-making unit to select between a set of outputs including at least some
of: taking no action, performing auditing, outputting a transcript of said
content, reducing bandwidth assigned to said transport, using an active
bitstream interference technique, stopping said transport, reducing quality of
20 the content, removing sensitive parts, altering the content, adding a message to
said content, not allowing printing of said content, not allowing photocopying
of said content, and not allowing saving of said content on portable media.

102. A system according to claim 101, said policy determinator
being operable to use:

an input of an amount of encrypted transport from a given user, and
said confidence level,

5 as factors in said rule based decision making.

103. A system according to claim 69, comprised within a
firewall.

10 104. A system according to claim 103, said transport data
monitor being operable to inspect incoming and outgoing data transport
crossing said firewall.

15 105. A system according to claim 69, operable to define a
restricted network zone within said network by inspecting data transport
outgoing from said zone.

20 106. A system according to claim 69, comprising certification
recognition functionality to recognize data sources as being trustworthy and to
allow data transport originating from said trustworthy data sources to pass
through without monitoring.

107. A system according to claim 69, comprising certification recognition functionality to recognize data sources as being trustworthy and to allow data transport originating from said trustworthy data sources to pass through with monitoring modified on the basis of said data source recognition.

5

108. A system according to claim 69, comprising certification recognition functionality to recognize data sources as being trustworthy and to allow data transport originating from said trustworthy data sources to pass through with said decision making being modified on the basis of said data source recognition.

10

109. A method of monitoring for distribution of predetermined content over a network, the method comprising:

obtaining extracts of data from at least one monitoring point on said network,

15

obtaining a signature indicative of content of said extracted data,
comparing said signature with at least one of a prestored set of signatures indicative of said predetermined content,

using an output of said comparison as an indication of the presence or absence of said predetermined content.

20

110. A method of controlling the distribution of predetermined content over a network, the method comprising:

obtaining extracts of data from at least one monitoring point on said network,

obtaining a signature indicative of content of said extracted data,

comparing said signature with at least one of a prestored set of
5 signatures indicative of said predetermined content,

using an output of said comparison in selecting an enforcement decision, and

using said enforcement decision in bandwidth management of said network.

10

111. A method according to claim 110, wherein enforcement decisions for selection include at least some of taking no action, performing auditing, outputting a transcript of said content, reducing bandwidth assigned to said transport, stopping said transport, reducing quality of the content,
15 removing sensitive parts, altering the content, adding a message to said content, using an active bitstream interference technique, restricting bandwidth to a predetermined degree, not allowing printing of said content, not allowing photocopying of said content and not allowing saving of said content on portable media.

20

112. A method according to claim 111, wherein said predetermined degree is selectable from a range extending between minimal restriction and zero bandwidth.

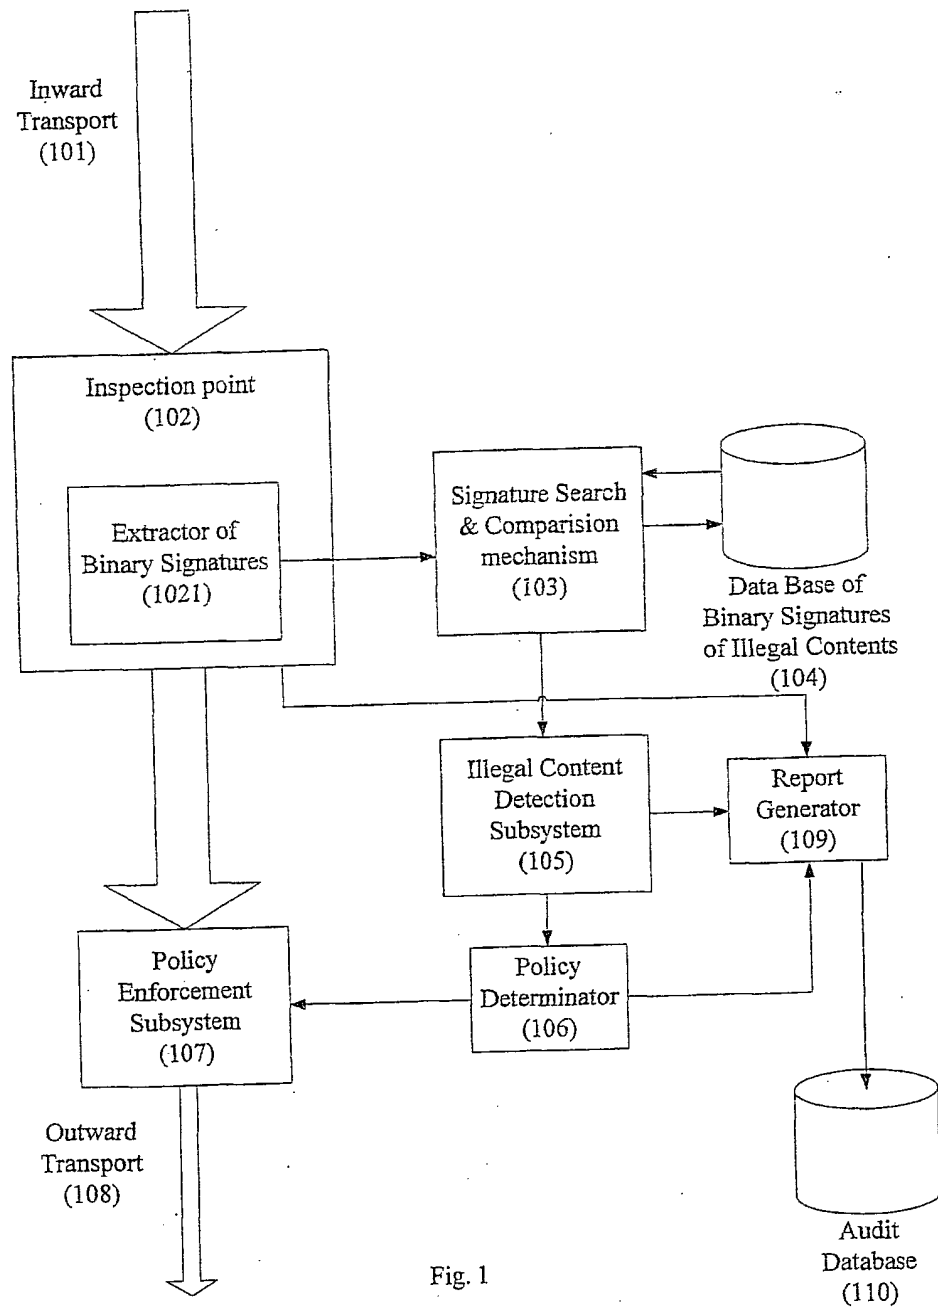


Fig. 1

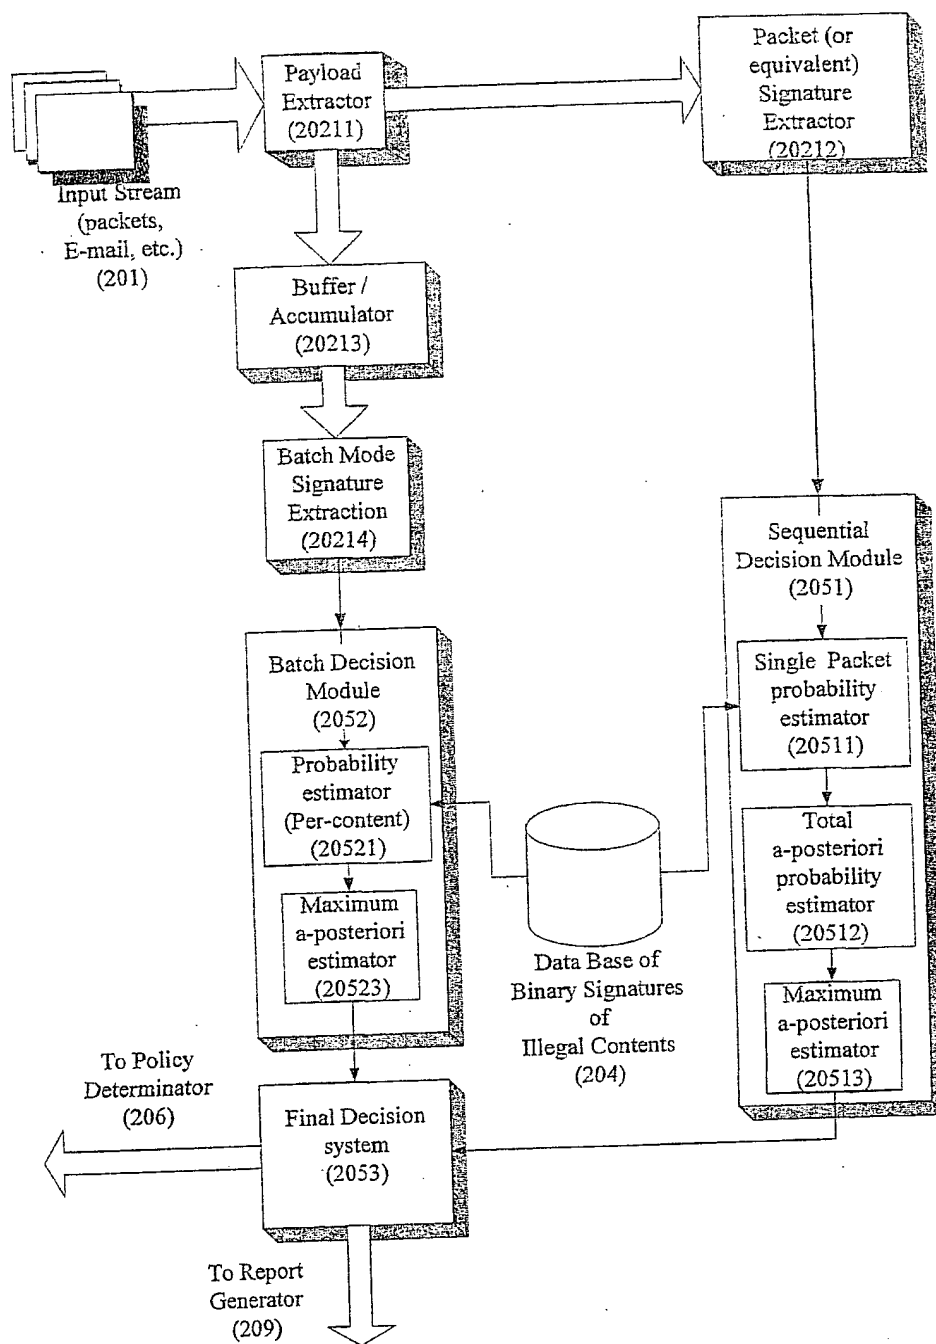


Fig. 2

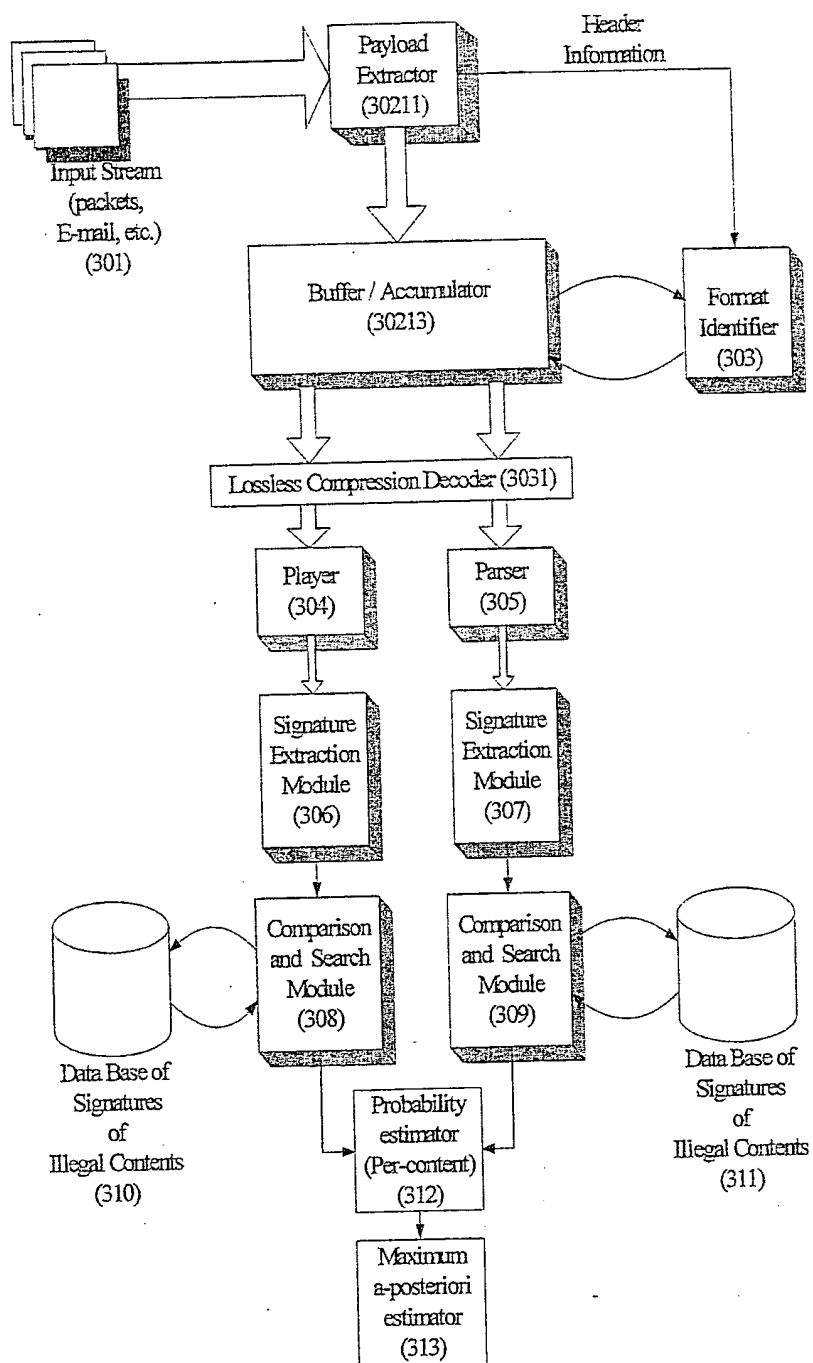


Fig. 3

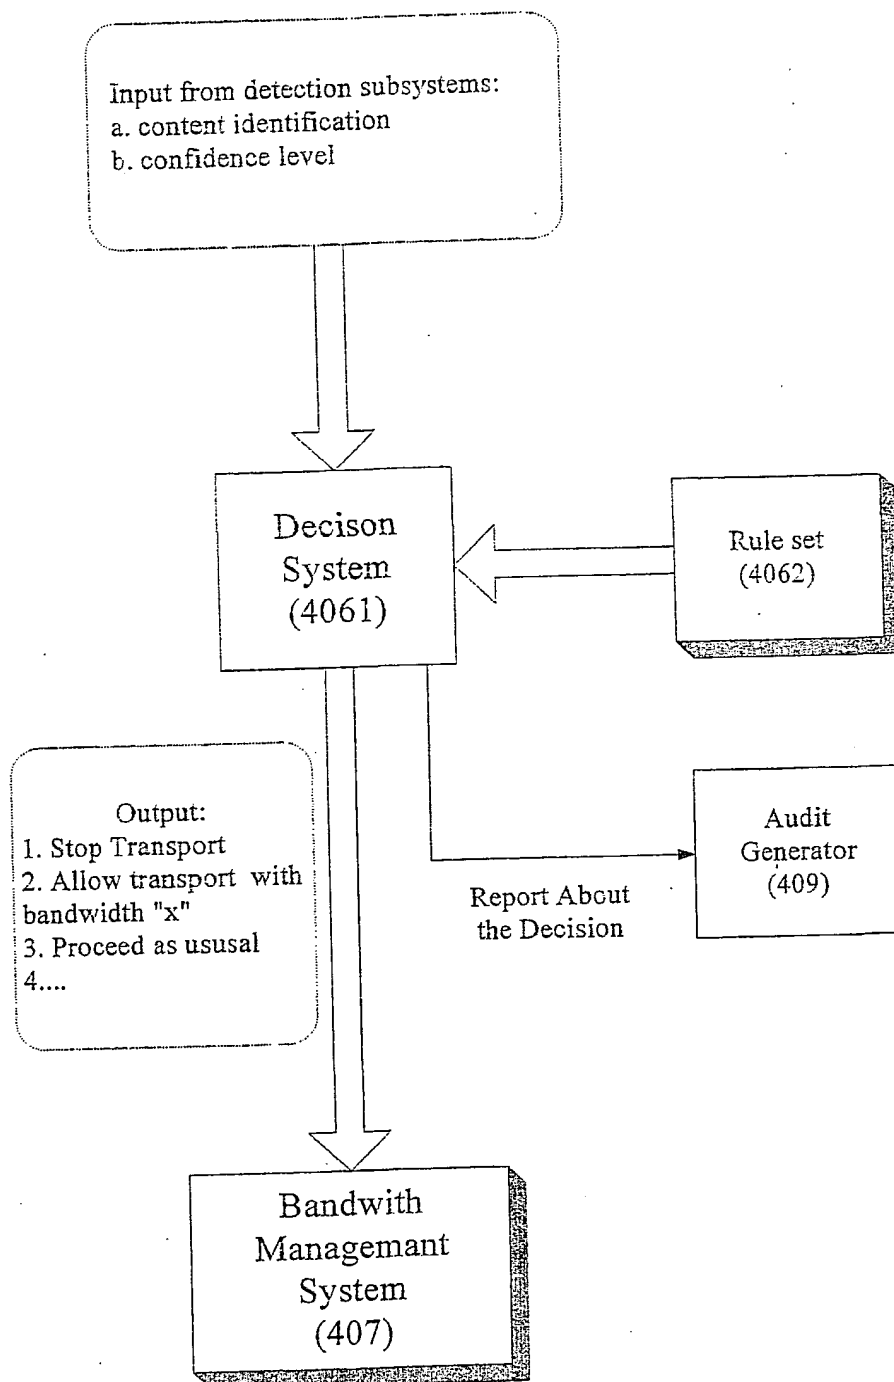


Fig 4

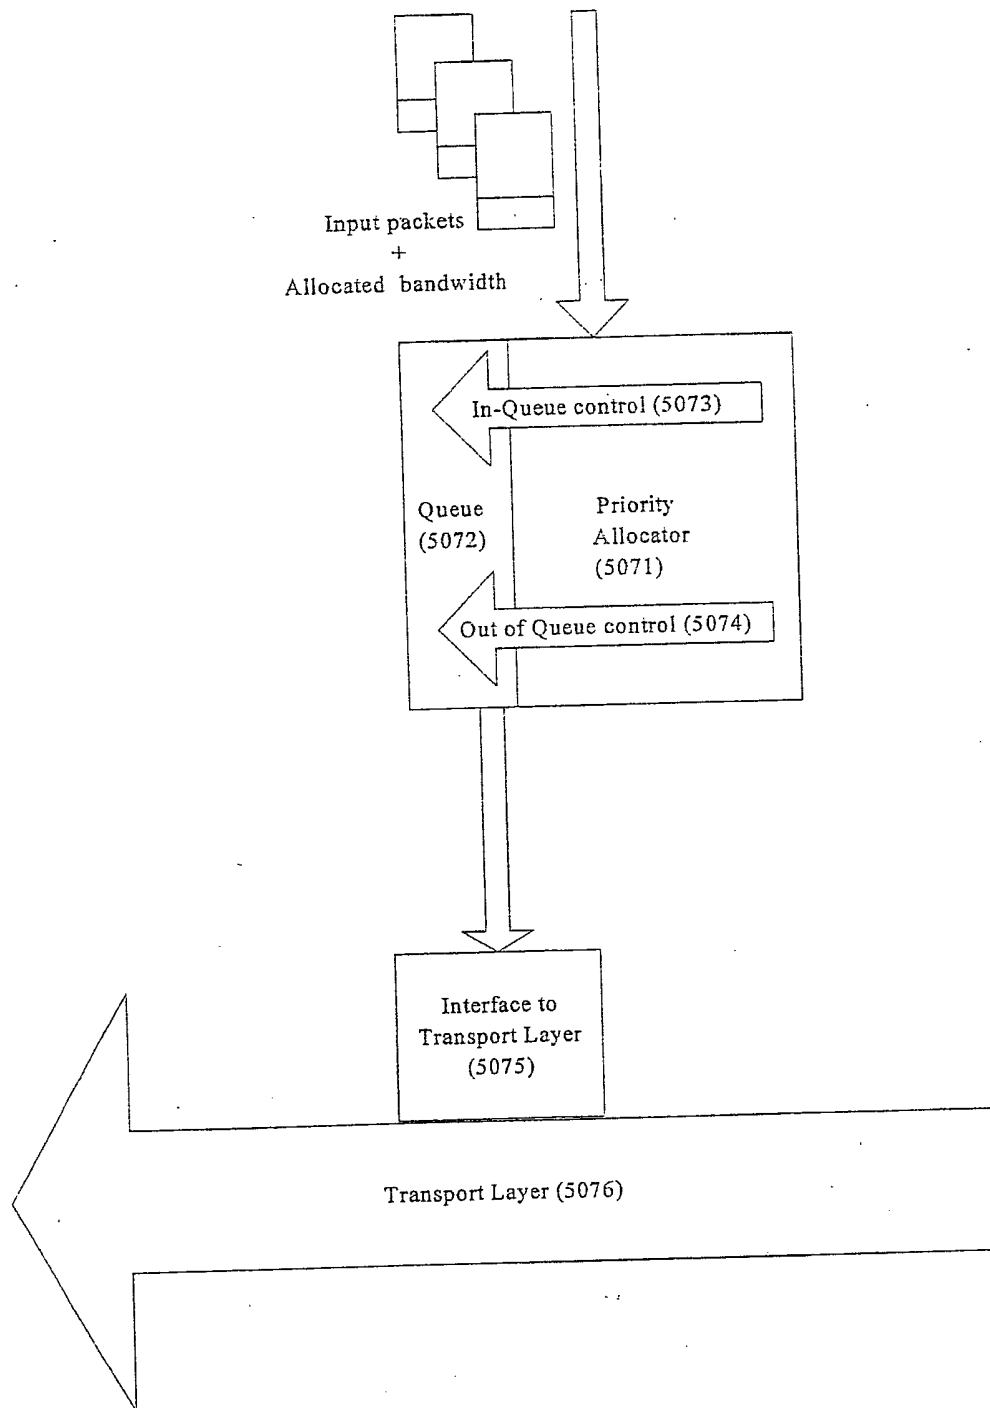


Fig 5

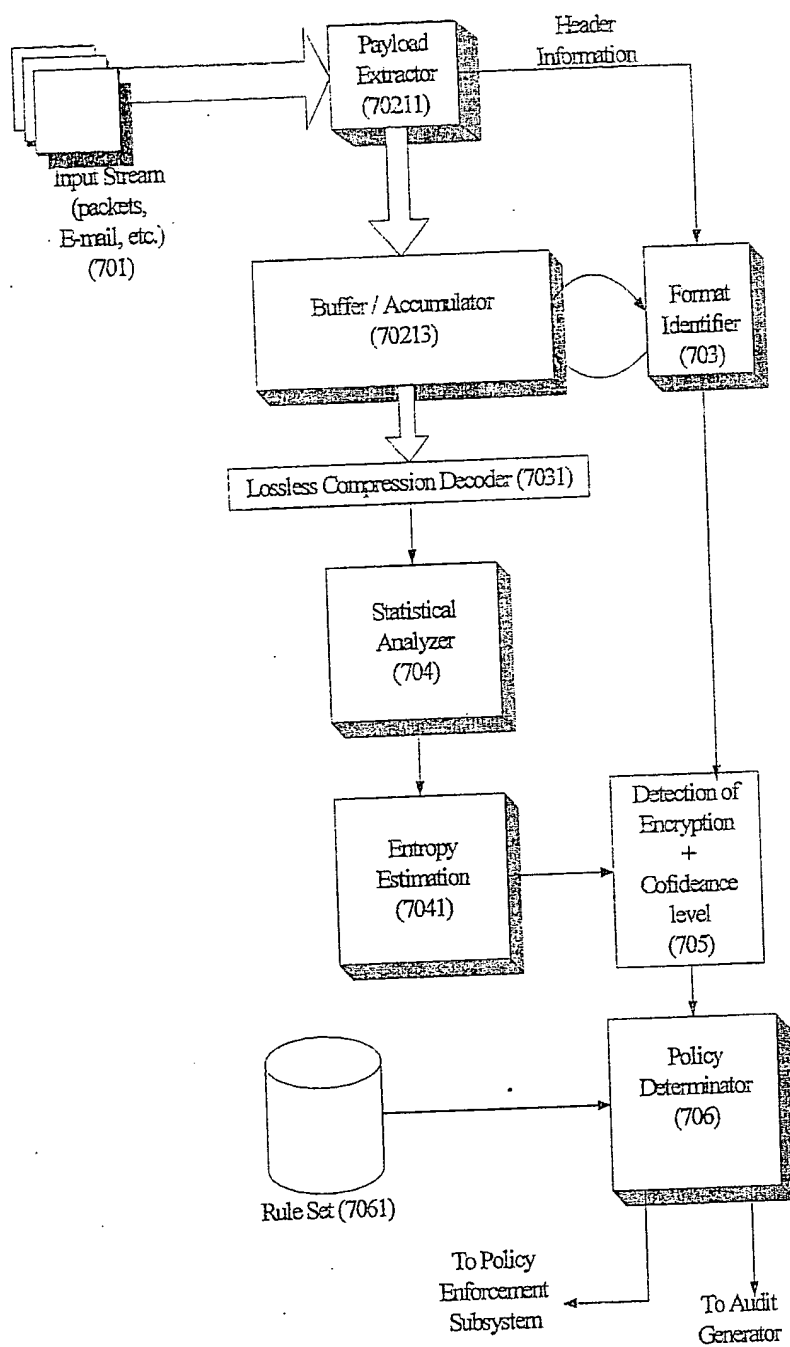


Fig. 6

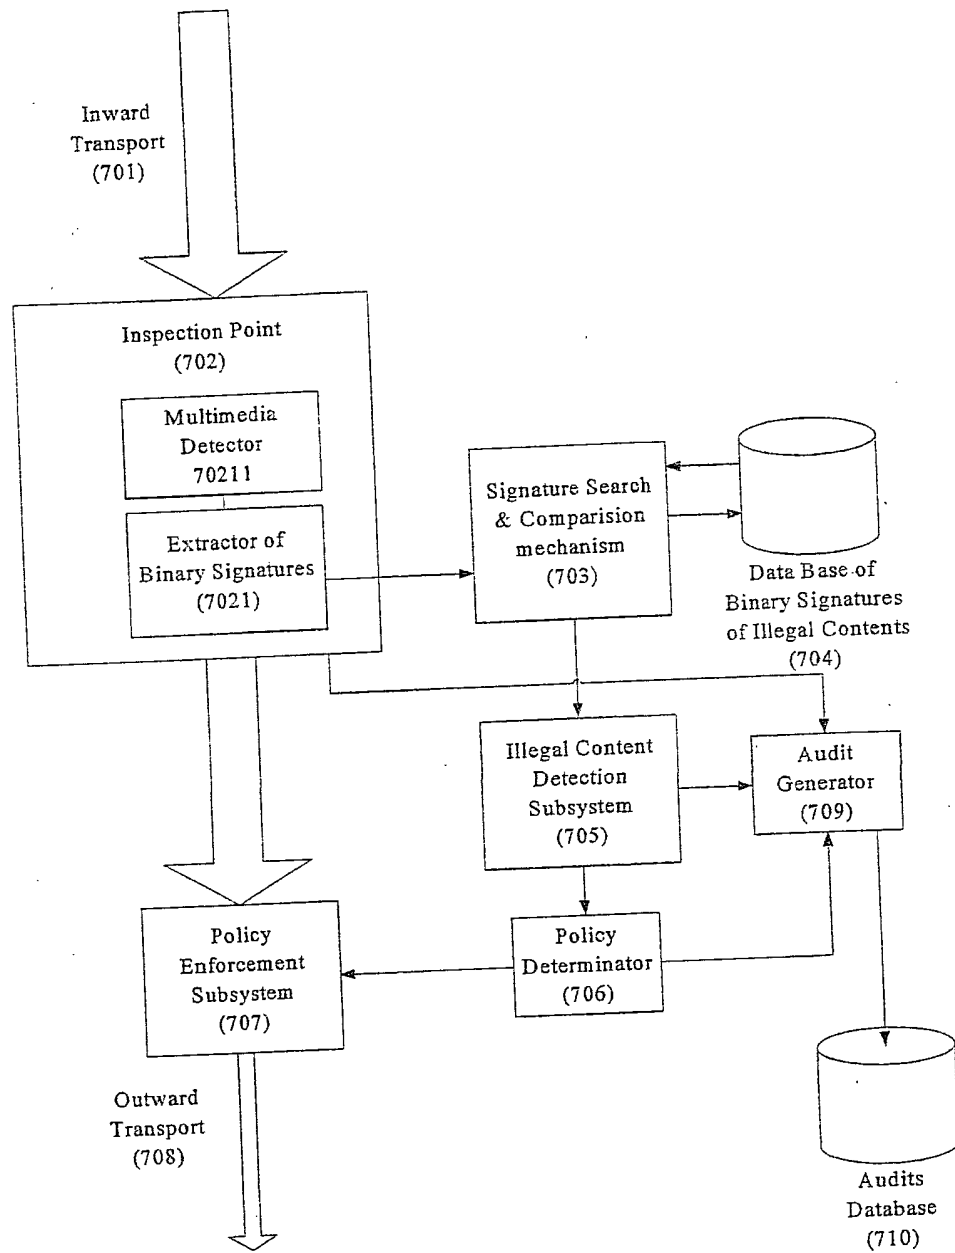


Fig. 7

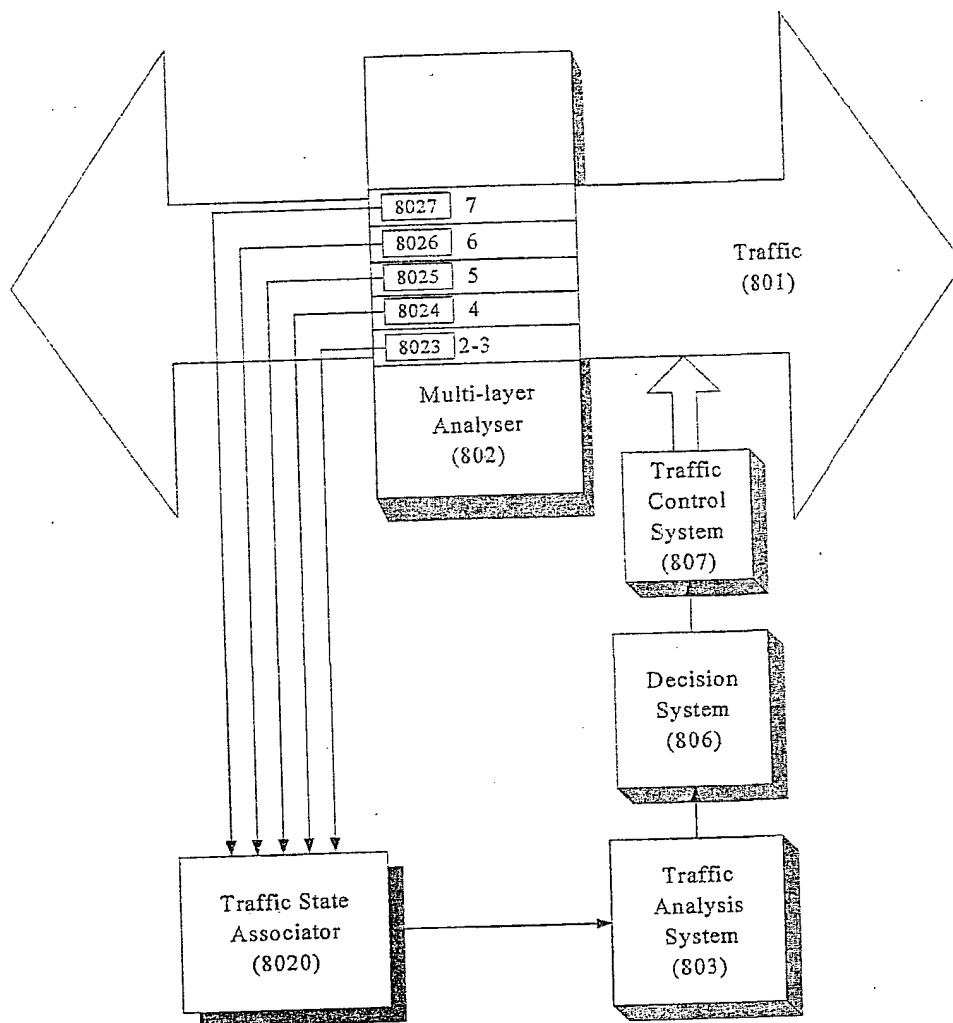


Fig 8

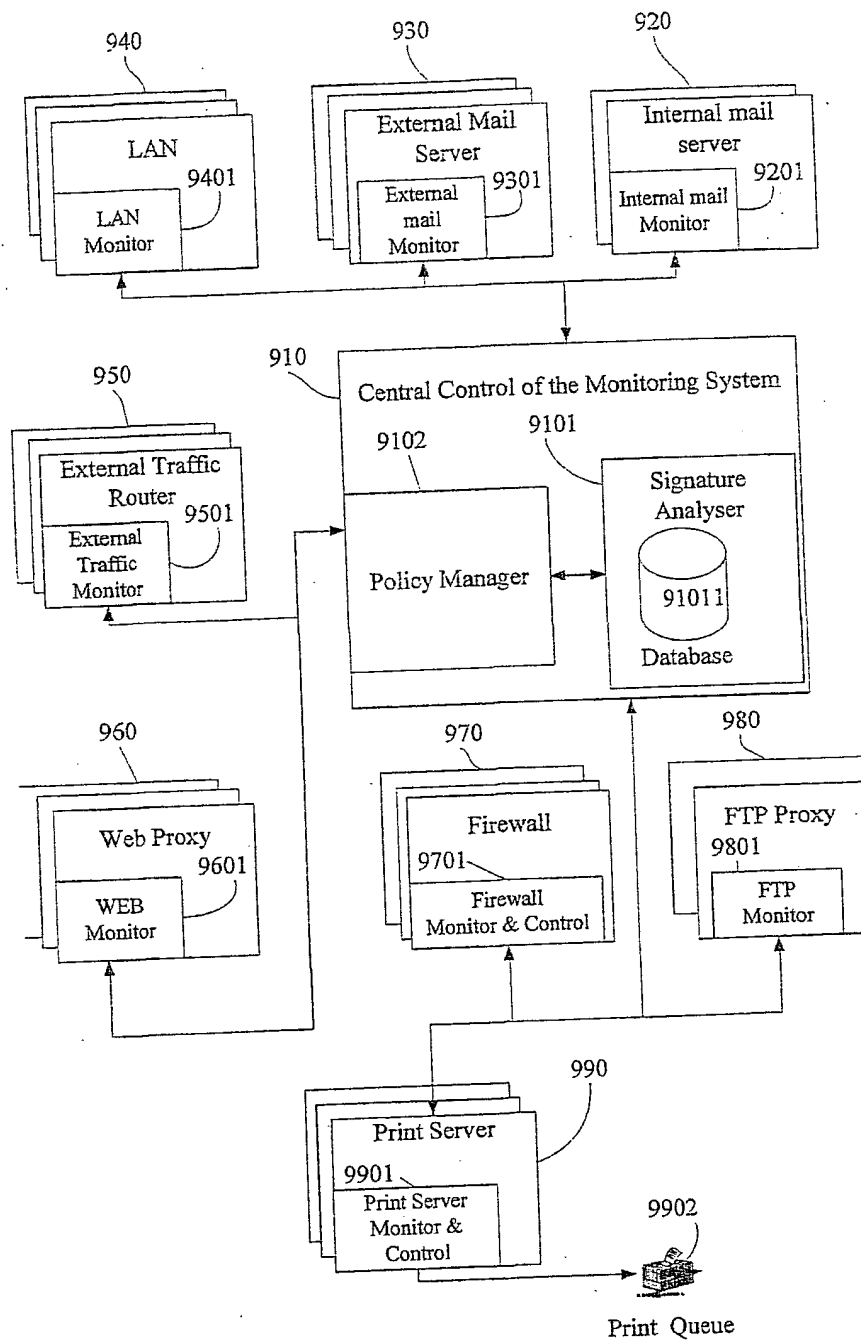


Figure 9

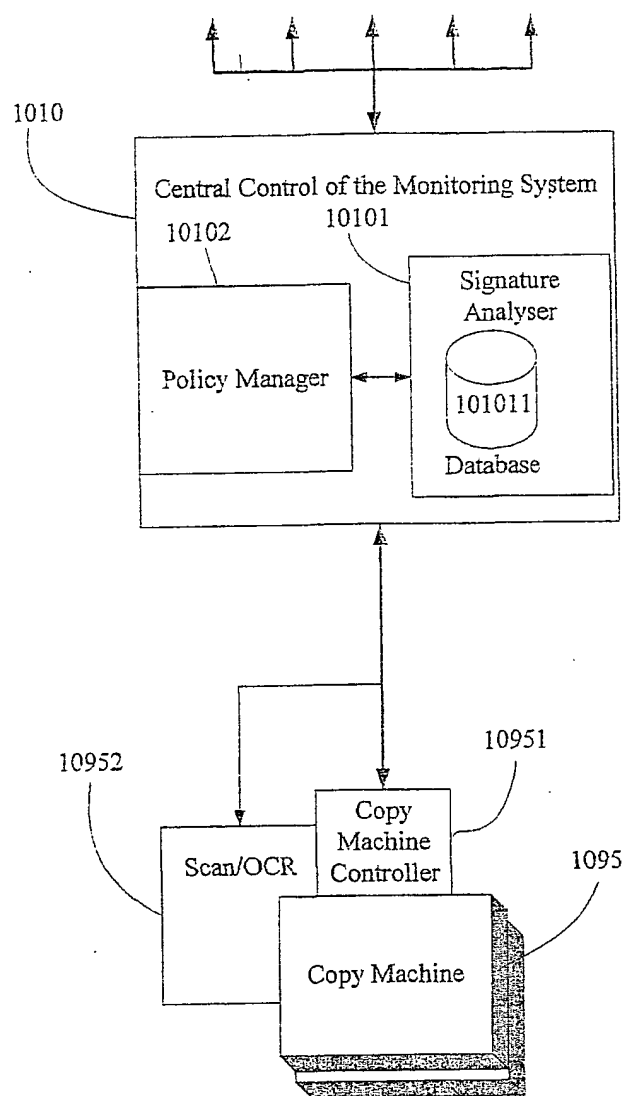


Figure 10

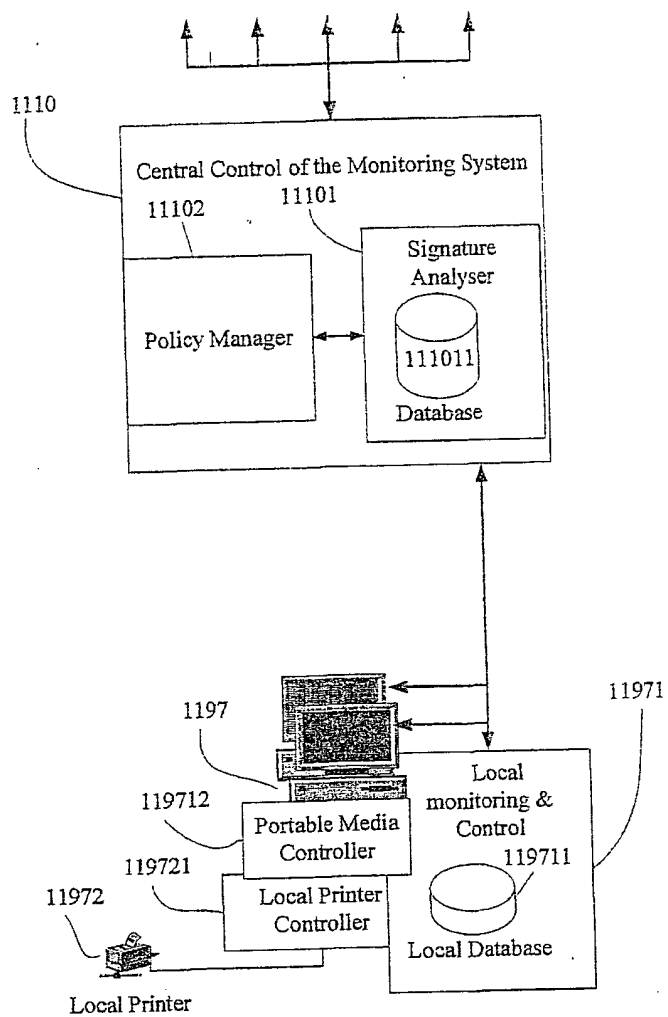


Figure 11

INTERNATIONAL SEARCH REPORT

 International application No.
 PCT/IL02/00037

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G06F 15/178

US CL : 709/224

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 709/224

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	US 6,327,677 B1 (GARG et al.) 04 December 2001, see col. 2, line 38 to col. 16, line 63.	1-17,34-36,6 9-79,86-87,109-110
A	US 6,076,105 A (WOLFF et al.) 13 June 2000, see col. 6, line 15 to col. 24, line 65).	1-112
A	US 5,870,744 A (SPRAGUE) 09 February 1999, see col. 2, line 50 to col. 9, line 67.	1-112
A,P	US 6,282,175 B1 (STEELE et al.) 28 August 2001, see the whole reference.	1-112
A,E	US 6,370,574 B1 (HOUSE et al.) 09 April 2002, see the whole reference.	1-112



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

14 MAY 2002

Date of mailing of the international search report

05 JUN 2002

 Name and mailing address of the ISA/US
 Commissioner of Patents and Trademarks
 Box PCT
 Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

ZARNI MAUNG

Telephone No. 703-305-3900

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)